



# 20 Deep Security

## Best Practice Guide



## About this document

Deep Security provides a single platform for server security to protect physical, virtual, and cloud servers as well as hypervisors and virtual desktops. Tightly integrated modules easily expand to offer in-depth defenses, including anti-malware, web reputation, intrusion prevention, firewall, integrity monitoring, and log inspection. It is available in agentless and agent-based options that can all be managed through a single console across physical, virtual, and cloud server deployments.

This guide is intended to help you get the most productivity out of the product. It contains a collection of best practices that are based on knowledge gathered from previous enterprise deployments, lab validations, and lessons learned in the field.

Examples and considerations in this document serve only as a guide and not a representation of strict design requirements. These guidelines do not apply in every environment but can help guide you through configuring Deep Security for optimum performance.

Trend Micro Incorporated reserves the right to change this document and products without notice. Before installing and using the software, review the Readme file and the latest version of the applicable documentation.

## This document contains:

- ➔ Deployment considerations and recommendations.
- ➔ Guidance in sizing server and storage resources for Deep Security implementation.
- ➔ Upgrade guidelines and scenarios.
- ➔ Recommended configuration to maximize system performance and reduce administrative overhead. Best practice tips for VDI, private and public cloud environments.

## Acknowledgments

This document was created by the following individuals who volunteered their time and expertise to the project:

Aldrin Ceriola, Jason Dablow, Erwin Dusojan, Mohamed Inshaff, Jill Maceda, Marion Mora, Winfred Lin, Reuel Morales, Raphael Bottino, Ebenizer Padua, Igor Valoto, Kyle Klassen, Fernando Cardoso, Ryoma Kobayashi, Glen Ronidel, Michael Mortiz, Dexter Lopez, Alwin Yu

The following people provided significant support and contribution during development and review:

Shiela Aballa, Rodel Villarez, Ziv Huang, Marty Tsai, Cellina Lin, Chris Lai, Paul Liang, Zion Li, Rico Hung, Ocean Chueh, Liza Rekadze

Revision: 1.7

Last updated: January 5, 2026

# Contents

<b>1</b>	<b>Environment</b> .....	<b>8</b>
1.1	Operating systems and database system.....	8
1.2	VMware vSphere and NSX compatibility with Deep Security .....	8
1.3	VMware Tools and NSX endpoint drivers (for Agentless Anti-Malware).....	8
1.4	Environmental recommendations for Apex Central integration.....	9
1.5	Environmental recommendations for Trend Vision One (XDR) integration.....	9
1.5.1	Trend Vision One (XDR) integration with Trend Cloud One – Endpoint & Workload Security... 9	9
1.5.2	Trend Vision One (XDR) integration with Deep Security Manager 20 LTS.....	9
1.5.3	Air-gapped environment consideration.....	10
1.5.4	Co-exist with third-party anti-malware and EDR solutions .....	10
1.6	New in Deep Security 20 LTS.....	10
<b>2</b>	<b>Sizing considerations</b> .....	<b>11</b>
<b>3</b>	<b>Installation and deployment</b> .....	<b>12</b>
3.1	Deep Security components.....	12
3.1.1	Deep Security Manager.....	12
3.1.2	Deep Security Agent and Deep Security Relay .....	15
3.1.3	Deep Security Virtual Appliance (DSVA).....	21
3.1.4	Database .....	23
3.2	VMware components.....	25
3.3	Supported deployment models .....	27
3.3.1	Standard small scale deployment .....	27
3.3.2	Medium scale deployment with VPN users .....	28
3.4	Testing Deep Security .....	29
<b>4</b>	<b>Upgrade and migration</b> .....	<b>30</b>
4.1	Deep Security Manager upgrade recommendations.....	30
4.2	Migration NSX-V to NSX-T .....	30
4.3	Upgrade Deep Security Virtual Appliance .....	30
<b>5</b>	<b>Configuration</b> .....	<b>31</b>
5.1	UI configurations .....	31
5.1.1	Dashboard .....	31
5.1.2	Alerts 31	
5.1.3	Policies 31	
5.1.4	Smart folders.....	33
5.2	Module configurations .....	33
5.2.1	Anti-Malware .....	33
5.2.2	Web Reputation .....	48
5.2.3	Firewall 48	

5.2.4	Intrusion prevention.....	52
5.2.5	Integrity Monitoring.....	55
5.2.6	Log inspection.....	58
5.2.7	Application Control .....	58
5.2.8	Connected Threat Defense (CTD).....	59
5.3	Administration and System settings .....	62
5.3.1	Recommendation scan.....	62
5.3.2	System settings.....	63
<b>6</b>	<b>Performance tuning and optimization .....</b>	<b>67</b>
6.1	Deep Security Manager .....	67
6.1.1	Configure Deep Security Manager's maximum memory usage .....	67
6.1.2	Configure multiple managers .....	68
6.1.3	Performance considerations for Deep Security Virtual Appliance .....	69
6.1.4	Performance profiles .....	69
6.2	Database.....	74
6.2.1	Exclude database files from anti-malware scans.....	74
6.2.2	Auto-growth and database maintenance.....	74
6.2.3	Database indexing.....	74
6.3	Deep Security Relay .....	74
6.3.1	Deep Security Relay location.....	74
6.3.2	Relay groups.....	75
6.4	NSX-V .....	75
6.4.1	NSX firewall .....	75
6.4.2	NSX security policy .....	76
<b>7</b>	<b>Disaster and recovery .....</b>	<b>78</b>
7.1	High Availability .....	78
7.2	Removing a virtual machine from Deep Security protection in a disaster .....	78
7.3	Recovering a physical machine (with Deep Security Agent) in a disaster .....	79
7.4	Recovering an inaccessible Deep Security Virtual Appliance .....	80
7.5	Isolating a Deep Security issue.....	81
<b>8</b>	<b>Deployment scenarios .....</b>	<b>83</b>
8.1	Multi-tenant environment .....	83
8.2	Environments using teamed NICs.....	84
8.3	Air-gapped environments.....	84
8.4	Solaris zones.....	85
8.5	Microsoft cluster servers.....	85
8.6	Microsoft Hyper-V.....	85
8.7	Virtualized environments (VDI) .....	86
8.7.1	Install the Guest Introspection Thin Agent with golden image.....	86

8.7.2	Persistent and non-persistent VMs .....	86
8.7.3	Deep Security Notifier.....	86
8.7.4	Automating VM activations .....	86
8.7.5	Note the number of protected VMs .....	86
8.7.6	Activating VM using event-based task .....	87
8.7.7	Golden image.....	87
8.7.8	Citrix XenDeskop .....	87
8.8	Private, public, and hybrid cloud environments .....	89
8.8.1	Amazon Web Services (AWS).....	89
8.8.2	vCloud environment .....	89
8.8.3	VMware SRM (Site Recovery Management) environment.....	91
8.9	SAP.....	92
8.10	IBM Rational ClearCase .....	93
8.11	Docker support.....	93
8.11.1	Supported Docker platforms .....	93
8.11.2	Container protection .....	93
8.11.3	Host protection.....	94
8.11.4	Deployment scripts.....	95
8.12	Automation activation from golden image.....	95
8.13	Oracle RAC cluster.....	100
8.14	SAML .....	100
8.15	File system support .....	100
8.16	Known issue with anti-malware causing kernel panic .....	101

# 1 Environment

Deep Security 20 LTS consists of several components working together to provide protection. The information provided in this section helps you determine the compatibility and recommended software for the following:

- Operating Systems
- Database Systems
- VMware vSphere and NSX Compatibility
- VMware Tools and NSX Guest Introspection Driver

## 1.1 Operating systems and database system

Refer to [System requirements](#) in the Deep Security Help Center.

## 1.2 VMware vSphere and NSX compatibility with Deep Security

VMware and Deep Security compatibility charts often change, especially when new versions of vSphere are released. For the latest compatibility chart, see [Deep Security LTS Release and VMware compatibility matrix](#).

## 1.3 VMware Tools and NSX endpoint drivers (for Agentless Anti-Malware)

The agentless anti-malware operations provided by Deep Security require the NSX File Introspection Driver to be installed on the virtual machines in order to be protected.

Refer to [VMware Product Interoperability Matrix](#) for details.

VMware includes the VMware NSX File Introspection Driver in VMware Tools 10.n, but the installation program does not install it on guest VMs by default. To install it on a guest VM, review the installation options described in the following table.

Available VMware Tools Installation Options		
Installation Option	vShield Endpoint	Action
Typical	NSX File Introspection Driver does NOT install	Do not select this option
Complete	NSX File Introspection Driver Endpoint installs	Select if you want all features
Custom	You must explicitly install NSX File Introspection Driver	Expand <b>VMware Device Drivers &gt; VMCI Driver</b> . Select <b>NSX File Introspection Driver</b> and choose <b>This feature will be installed on local drive</b> .

Table 1: VMware Tools Installation Options

**NOTE** The NSX Driver bundled with VMware Tools is now called Guest Introspection upon upgrading vSphere to version 5.5 Update 2. However, Guest Introspection service is used for NSX 6.1 or later. If you are using NSX 6.0 and earlier, the name of this service is VMware Endpoint.

## 1.4 Environmental recommendations for Apex Central integration

Apex Central 2019 or later is supported in Deep Security 12.0 to implement the Connected Threat Defense strategy in defense against emerging threats and targeted attacks.

For more details about how to configure Connected Threat Defense with Deep Security, see [Detect emerging threats with Connected Threat Defense](#) in the Deep Security Help Center.

## 1.5 Environmental recommendations for Trend Vision One (XDR) integration

Starting with Deep Security Agent 20.0.0-1337, Trend Vision One (XDR) Activity Monitoring preview is available.

### 1.5.1 Trend Vision One (XDR) integration with Trend Cloud One – Endpoint & Workload Security

1. Follow the instructions in [Integrate Workload Security with XDR](#) to register Trend Cloud One – Endpoint & Workload Security to Trend Vision One.
2. Allow these URLs for Deep Security Agent to connect to Trend Vision One backend services:
  - ak5ih4ev105f2-ats.iot.us-east-1.amazonaws.com
  - azrb5zzyvrkw6-ats.iot.us-east-1.amazonaws.com
3. See [Port numbers, URLs, and IP addresses](#).

The agent sends events to Trend Cloud One – Endpoint & Workload Security, which then forwards to Trend Vision One. Workload Security does not store any of this information, Activity Monitoring data persists only in Trend Vision One.

### 1.5.2 Trend Vision One (XDR) integration with Deep Security Manager 20 LTS

1. Follow instructions provided in [Integrate with Trend Vision One \(XDR\)](#) to register Deep Security Manager to Trend Vision One.
2. The following URLs need to be open for Deep Security Manager to connect to Trend Vision One backend services.
  - \*.xdr.trendmicro.com:443
  - \*.xbc.trendmicro.com:443
  - \*.mgcp.trendmicro.com:443
  - \*.manage.trendmicro.com:443
  - \*.xdr.trendmicro.co.jp:443 (include this one also for Japanese regions)
3. See [Port numbers, URLs, and IP addresses](#).

### 1.5.3 Air-gapped environment consideration.

Trend Vision One functionality requires internet connectivity to allow Deep Security Manager to send information to the Trend Vision One Data Lake. In an air-gapped environment, it is possible to configure proxy settings to allow Deep Security Manager to connect to the internet. See [Connect to Deep Security Software Updates, CSSS, and more via proxy](#).

### 1.5.4 Co-exist with third-party anti-malware and EDR solutions

No information is available currently.

## 1.6 New in Deep Security 20 LTS

For a list of major changes in Deep Security 20 LTS, see [What's new?](#) in the Deep Security Help Center.

## 2 Sizing considerations

Sizing recommendations depend on the type of environment and various other factors such as network, hardware, software and applications. For the latest sizing guidelines for Deep Security Manager, its database, Deep Security Agent, and Deep Security Virtual Appliance, see [Sizing](#) in the Deep Security Help Center.

### 3 Installation and deployment

Deep Security is composed of several components that have to communicate with each other. If you are deploying in a highly-segmented network environment, knowledge about the various ports it uses can prevent unintended functionality disruptions. Make sure that all required ports are open and not reserved for other purposes.

For a list of ports required in Deep Security, see [Communication ports used by Deep Security](#).

#### 3.1 Deep Security components

##### 3.1.1 Deep Security Manager



Figure 1: Deep Security Manager

##### A. Deployment considerations

- Use the fully qualified domain name (FQDN). Define Deep Security Manager to use its FQDN, which is resolvable by all other components. If this was not defined correctly during the installation, you can modify it under **Deep Security Manager > Administration > System Information**.

The manager address or name specified in **Network Map with Activity Graph** is used by the other components to contact Deep Security Manager.

- Deploy at least one secondary Deep Security Manager node for redundancy. See [Configure Multi-Node Managers](#).

**NOTE** Multi-node deployment is not meant to address geographic dispersion. Therefore, Deep Security Manager nodes and database must be in the same network segment (for example, NO DSM1/DB in London with DSM2 in Paris connected via WAN).

- Deep Security Manager virtual machine settings recommendations:
  - Use vmxnet3 as vNIC driver.
  - Use Paravirtual SCSI as vDisk controller.
  - Thick Eager Zero Disk is preferred.
- TLS1.2 is enforced in Deep Security 11.1 and later. However, it is possible that some customers cannot implement such enforcement. In that case, use the workaround described in [Enable early TLS \(1.0\)](#).

## B. Other recommended settings

By default, the installer is configured to use 1 GB of memory. If the installer fails and you receive a "java.lang.OutOfMemoryError" error during installation, you may need to configure the installer to use less memory.

To configure the amount of RAM available to the installer:

1. Go to the directory where the installer is located.
2. Create a new text file called Manager-Windows-20.0.nnn.x64.exe.vmoptions or Manager-Linux-20.0.nnn.x64.vmoptions, depending on your installation platform (where "nnn" is the build number of the installer).
3. Edit the file by adding the line: "-Xmx800m". In this example, 800 MB of memory would be made available to the installer.
4. Save the file and launch the installer.

## C. Load balancers

Deep Security Manager can specify a hostname and a port that replace the default settings to put a load balancer in front of:

- Manager user interface port (4119)
- Manager heartbeat port (4120)
- Relay port (4122)

To configure the load balancers, in Deep Security Manager go to **Administration > System Settings > Advanced > Load Balancers**. This setup is recommended for multi-tenant (service provider) environments, especially in the cloud.

A load balancer allows the following:

- Tunneling for ports 4119, 4120, and 4122 traffic over 443 (three load balancers with three addresses).
- Ability to add and remove Deep Security Manager nodes on demand, without generating update traffic going to each Deep Security Agent and Deep Security Virtual Appliance in the environment.

Load balancers can be configured to use different ports for different traffic. If the load balancer supports port re-direction, it can be used to expose all the required protocols over port 443 (using three load balancers).

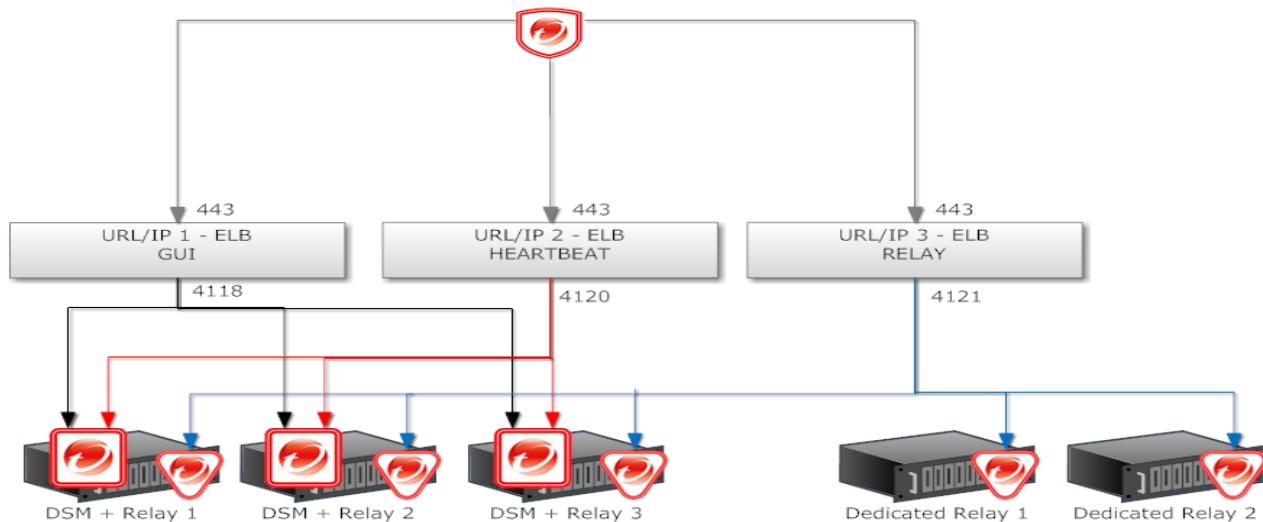


Figure 2: Load Balancer Support

In all cases, the load balancer should be configured as http or https load balancer without SSL Terminating. This ensures that a given communication exchange happens directly between Deep Security Agent, Deep Security Virtual Appliance, and Deep Security Manager from start to finish. The next connection can balance to a different node.

On environments with a fixed number of Deep Security Manager nodes, it is not required to use a load balancer in front of Deep Security Manager to perform load balancing. Deep Security has a built-in load balancing mechanism.

**NOTE** For high availability and scalability, the Deep Security Manager provides the URL address of all nodes to all agents and virtual appliances. The agents and virtual appliances use the list to randomly select a manager node and continue to try the rest of the list until a node can be reached. If it cannot reach any nodes, it will wait until the next heartbeat and try again.

**NOTE** For Deep Security Manager installed in an AWS Cloud infrastructure, auto-scaling of manager nodes is not supported.

Useful information in configuring AWS load balancers for Deep Security

It is recommended to use Classic Load Balancer. This lines up with the Cloud Formation script deployment and it is the best way to build a Deep Security Manager environment.

Classic Load Balancer is easy to deploy, especially if you plan to use just one balancer for all three Deep Security services.

- Web console – TCP 4119
- Heartbeat – TCP 4120
- Relay – TCP 4122

For deployments that require the use of multiple load balancers, it is sometimes best to use a combination of Application and Network Load Balancers:

- If you are using port 443 on all three services (web console, heartbeat and relay), 3 load balancers are required because all three services are using the same port number. Instead of three Classic Load Balancers, you should leverage the following:
  - Network Load Balancer (for heartbeat)
  - Application Load Balancer (for web console and relay)
- If the relay and manager are on separate computers, multiple load balancers are required. It is best to leverage the Application and Network Load Balancers, which also provides better scalability and performance.

#### Application Load Balancer

You can use Application Load Balancer or ELB for Deep Security Manager TCP port 4119 and Relay TCP port 4122.

- In the target group for Deep Security Load Balancer - Manager Web Console (TCP 4119) and the target group for Deep Security Load Balancer - Relay (TCP 4122): Configure HTTPS as the Protocol and use ELB stickiness session.
- For Deep Security Manager Web Console: Advanced Health Check Settings > Success Code. Change 200 to 302.
- For Deep Security Relay: Advanced Health Check Settings > Success Code. Change 200 to 403.

#### Network Load Balancer

You can use Network Load Balancer for Deep Security Manager heartbeat TCP port 4120.

- In the target group for Deep Security Load Balancer - HeartBeat (TCP 4120): Configure TCP as Protocol and do not configure stickiness session.

### 3.1.2 Deep Security Agent and Deep Security Relay



Figure 3: Deep Security Agent or Relay

## A. Deployment considerations

1. Each computer should be able to resolve the fully qualified domain name of Deep Security Manager for a successful deployment.
2. The clock on a Deep Security Agent or Deep Security Relay machine must be synchronized with Deep Security Manager within 24 hours. It is recommended to synchronize the time with NTP server.
3. If the client machine where Deep Security Agent or Deep Security Relay is installed has a previous OfficeScan client, the drivers (tmactmon, tmevtmgr, and tmcomm) must be fully uninstalled prior to installation. After uninstallation finishes, you must reboot the computer.

Deep Security Agent and OfficeScan client use the same name for drivers, however, Deep Security Agent cannot use OfficeScan client's drivers and OfficeScan cannot use Deep Security Agent's.

4. In Deep Security Manager 10.3 or later, the **Enable Relay** button has been removed. Instead, go to **Relay Management**.

**NOTE** Disabling the relay feature on a Windows 10 agent can sometimes take more than ten minutes to complete.

**NOTE** After you disable the relay function, the agent retains the relay repository folder and it does not free up the disk space automatically. You need to delete the relay folder repository manually.

- Windows: C:\ProgramData\Trend Micro\Deep Security Agent\relay\www\
- Linux: /var/opt/ds\_agent/relay/www

The new **Relay Management** page does not allow you to add or modify relay group descriptions.

5. There is a combined mode feature in Deep Security that allows Deep Security Virtual Appliance and Deep Security Agent to work together in providing security. In combined mode, the features are distributed so that some protection is supplied by Deep Security Agent and other protection is given by Deep Security Virtual Appliance. There is no concept of redundancy or standby, so if either of these agents fail, the corresponding protection or feature is lost.

In the **Settings** menu at policy level or computer level, you can select which component has to provide protection when both Deep Security Agent and Deep Security Virtual Appliance are present, as shown in the following illustration:

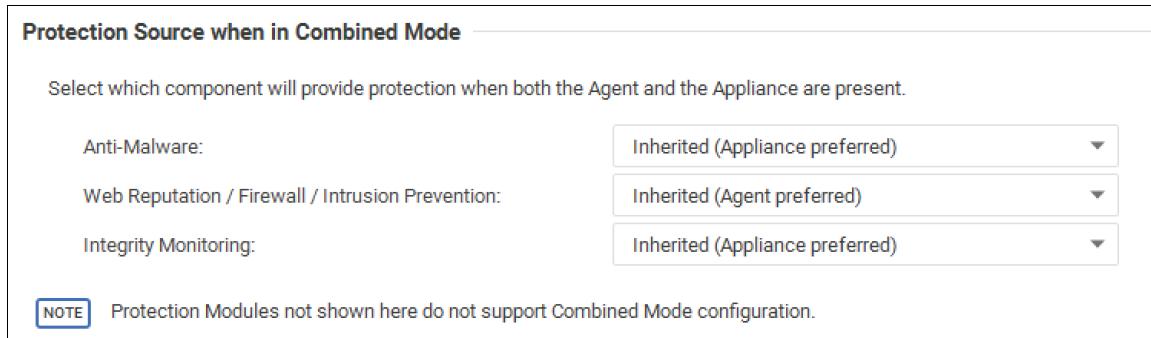


Figure 4: Combined Mode

If you do not use NSX Advanced or Enterprise version and the consolidation ratio of an ESXi host is high (for instance, one ESXi host contains 100 VMs), then choose anti-malware and integrity monitoring to be provided by Deep Security Virtual Appliance and the rest to be provided by Deep Security Agent to benefit the performance.

**NOTE** With agentless protection, anti-malware will not support the advanced features such as behavior monitoring

6. Check the fully qualified domain name (FQDN) of the machine before and after the Deep Security Agent installation. A brief network interruption occurs during the agent installation process. Sometimes, it can affect Dynamic Host Configuration Protocol (DHCP) auto-registration. It is recommended to verify the computer's FQDN (ping -a <ip or server name>) before and after the installation. Should an issue with auto-registration arise, use ipconfig /registerdns or reboot the computer.
7. When Deep Security Agent 10.1 or earlier was installed on Linux, it disabled the iptables service to avoid firewall conflicts unless you added a configuration file that prevented that change. However, the iptables service is used for more than just firewall (for example, Docker manages iptables rules as part of its normal operation), so disabling it sometimes had negative consequences.


Starting with Deep Security 10.2, the functionality around iptables changed. Deep Security Agent no longer disables iptables. If iptables is enabled, it stays enabled after the agent installation; if iptables is disabled, it stays disabled.

If the iptables service is running, Deep Security Agent and Deep Security Manager require certain iptables rules. Refer to [Using Deep Security with iptables](#).


8. Install multiple dedicated Deep Security Relays to achieve redundancy and optimize the bandwidth usage. At least one Deep Security Relay is required for a Deep Security environment, but a minimum of two is recommended. It is also recommended to deploy dedicated servers for Deep Security Relay.
9. Deep Security Relay's communication direction must be set to bidirectional; otherwise, the rule update might fail to apply.
10. Anti-malware functionality might have some problems if a 10.0 Deep Security Manager activates a 10.3 Deep Security Agent. It is recommended to use Deep Security Manager 20 LTS to manage earlier Deep Security Agents 10.0, 11.0 and 12.0. Refer to [supported agent versions](#) in Deep Security Manager 20.
11. When you install Deep Security Agent, only send the installer file (msi, rpm) to the destination machine. The plug-ins can be deployed to Deep Security Agent after activation and policy is assigned to the computer.

12. Trend Micro recommends using a distributed switch for deploying NSX. However, if you wish to use local storage, follow these steps:

- In each ESXi of the cluster, configure the **Agent VM Settings** to use local datastore and standard port group.

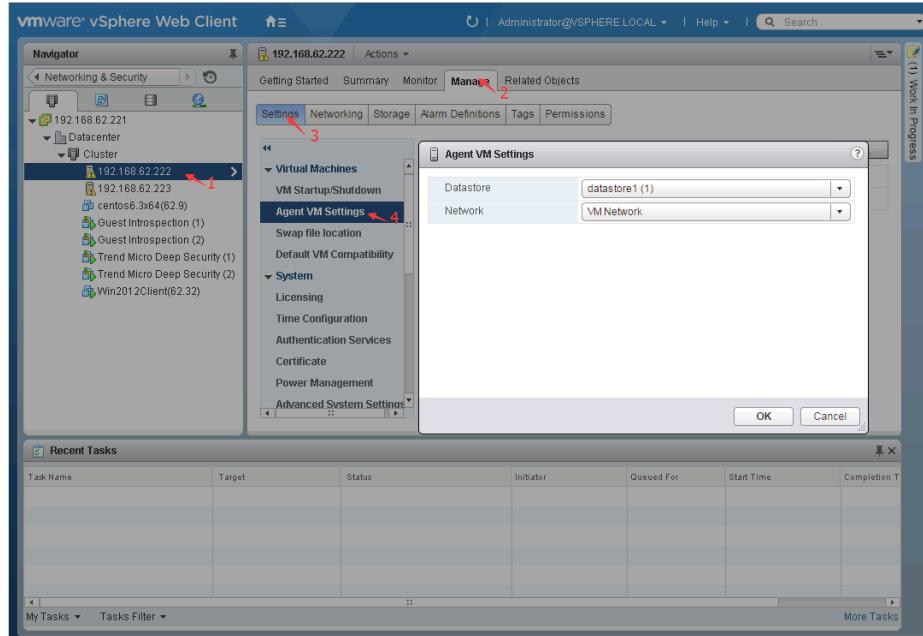

- In the service deployment wizard, select **Specified on-host** for both datastore and network.

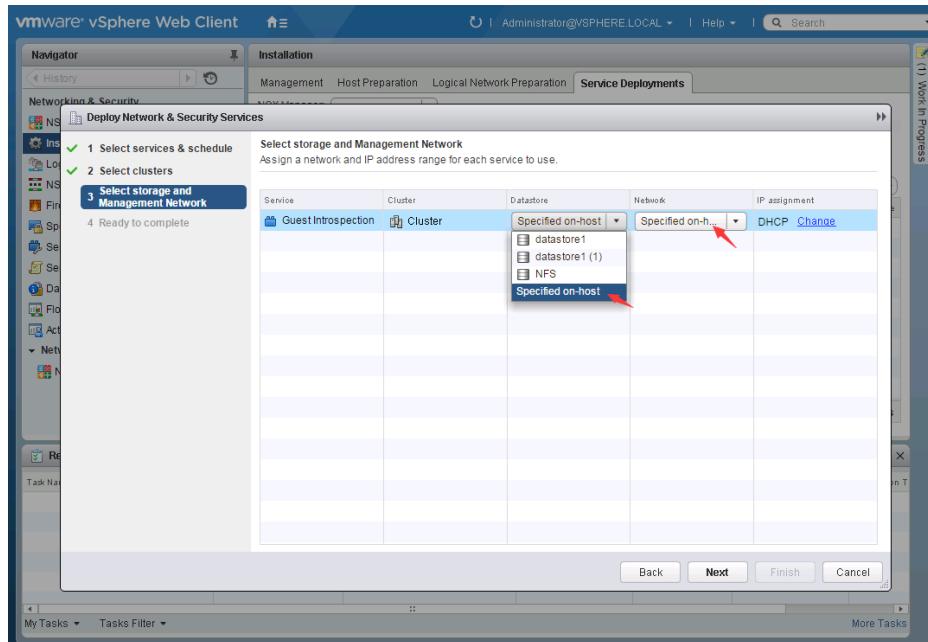

## B. Agent deployment scripts

The Deep Security Manager's deployment script generator can be used to generate scripts that run on computers where the agent is to be installed. The script can be modified to optionally perform subsequent tasks like activation and policy assignment.

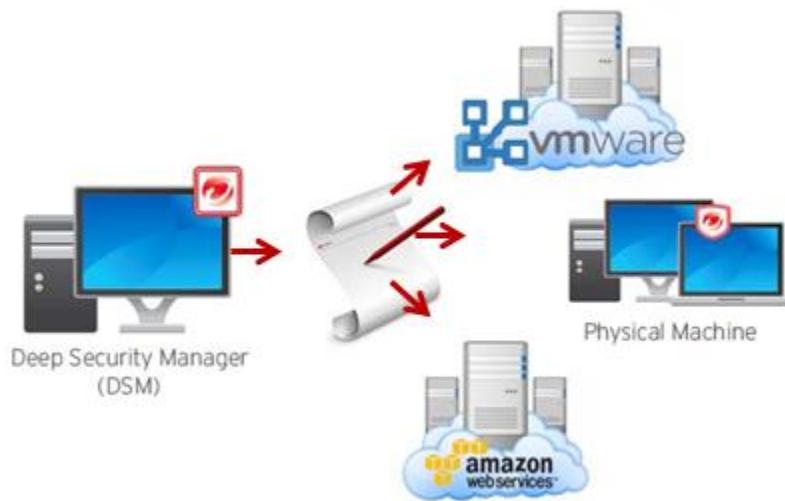


Figure 5: Deployment Script

Consider using deployment scripts in the following scenarios:

- Environments where there is a need to deploy and activate multiple agents.
- Automate the activation process and deployment of policies.
- Activate and deploy to clients in environments where the server cannot communicate or discover clients directly, but clients can reach the server without problem.
- In Amazon Elastic Compute Cloud (Amazon EC2) and Azure environments, it can be bundled with an endpoint and used while instances are being auto-scaled.

## C. Agent version control

Agent version control provides you and your security operations team with control over the specific versions of Deep Security Agent to be deployed when:

- using deployment scripts
- upgrading the agent through an upgrade alert, button, check box or other widget in the manager (the exceptions are listed in the FAQ)
- upgrading the agent through the agent upgrade on activation feature

This allows security operations teams who do not have control over Deep Security Manager's local inventory of agents or the relays the ability to declare exactly which agents are to be used at any given time.

As Trend Micro releases new agents, your security operations team can test them in controlled environments before changing the version control settings to expose the new agents to downstream applications teams in their production environment. Refer to this Help Center article for the setup of [Agent Version Control](#).

## D. Other considerations

- Deployment scripts only support basic function and cannot fulfill all needs for all environments. Adjust the scripts to fit your specific needs.

Some environments might experience a delay in starting the `ds_agent` service. If the `dsa_control` activation signal is sent before the `ds_agent` service is started, this might prevent the activation from working successfully. Extend the sleep time in the scripts to prevent this.

For example, in Amazon Web Services (AWS) testing, concurrent launching of 100 instances had better results when the sleep time was set to more than 60 seconds. This depends highly on AWS' system loading, disk I/O, CPU loading, network bandwidth, and database configuration.

**NOTE** If you are deploying the agent using script, do not reboot the computer immediately following successful Deep Security Agent installation, the agent activation can trigger installation of other required modules like Anti-malware if you have it enabled. This may require 3 to 5 minutes to complete all post-install actions. Rebooting immediately interrupts this process. If reboot is required, delay the computer reboot for 5 to 10 minutes after Deep Security Agent installation.

- In Amazon Web Services (AWS EC2) environments, the new instances must be able to access the URLs specified in the generated deployment script. This means that Deep Security Manager must be either internet facing, connected to AWS via VPN/Direct Link, or deployed on Amazon Web Services as well.
- The base tenant must import the agent packages before using deployment scripts (for both single and multi-tenant deployments).
- The agent-initiated activation feature must be configured correctly in Deep Security Manager for scripts to do activation tasks.

The agent-initiated activation option must be enabled on the **Administration > System Settings > Agents** tab.

- By default, port 4118 is not open on the security group (firewall) of AWS. To activate from the Deep Security Manager console, the Deep Security Manager must be able to communicate with the EC2 instances running Deep Security Agent on port 4118 of AWS. To allow 4118 on the security group of AWS:

- Open the AWS web console.
- Go to **Network and Security**.
- Select **Security Group**.
- Under TCP Port (Service), check if port 4118 is listed. If not, select **Create a rule** to add it.

You can telnet to the machine to verify communication on port 4118.

To protect a new instance of AWS automatically, refer to [Deploying Deep Security agents using the Amazon Web Services \(AWS\) management console](#).

### 3.1.3 Deep Security Virtual Appliance (DSVA)



Figure 6: Deep Security Virtual Appliance

#### A. Deployment considerations

- You must download the Deep Security Virtual Appliance installer package into Deep Security Manager prior to the deployment of Deep Security Virtual Appliance and addition of the vCenter server to Deep Security Manager.

Starting in Deep Security 12, the appliance package uses CentOS 7.

There is a known issue with virtual machine (VM) protected using agentless in NSX-V deployment. The VM is moved (using vMotion) from ESX A to ESX B, where both ESX A and ESX B have an appliance installed. In that scenario, the source appliance stores some temporary data to a relay and the target appliance downloads the package from the relay. However, if the relay is disabled, deleted, or deactivated, the target appliance is not able to download the package and it could fail to restore some data (such as the integrity-monitoring baseline) on the target appliance.

- Ensure that Deep Security Virtual Appliance can resolve the FQDN of Deep Security Manager and that the ESX server is able to connect to the Deep Security Manager FQDN at port 4119. There will be issues in installing the driver and deploying Deep Security Virtual Appliance if ESX is unable to connect successfully.

Ensure that Deep Security Manager and vShield Manager FQDN can be resolved by Deep Security Virtual Appliance.

Do not update the VMware Tools within Deep Security Virtual Appliance. Deep Security Virtual Appliance uses the device drivers that come with the version of tools it was built with. When a tool upgrade is implemented, Deep Security Virtual Appliance may not start.

- Change Deep Security Virtual Appliance's default password after installation by pressing <F2> and selecting the option **Configure Password** on the console. The default password for the deployed Deep Security Virtual Appliance image is "dsva".
- Confirm that NSX Manager has the correct vCenter and Lookup Service settings. In the NSX Manager console, go to **Manager > NSX Management Service**.

Figure 7: vCenter Server on NSX Manager

For NSX-T, in the NSX Manager console go to **System > Fabric > Computer Managers**.

Figure 8: vCenter Server on NSX-T Manager

- When creating VMs to be protected by Deep Security Virtual Appliance, consider the following:
  - VMware Tools 10.0.9 or later with the Guest Introspection Driver should be installed.
  - Virtual Disks Supported: LSI Logic parallel, LSI SAS, or VMware paravirtual SCSI driver (Buslogic is not supported).
- For details on how to get started with NSX-T or NSX-V, refer to these articles in the Deep Security Help Center:
  - [Deploy the appliance \(NSX-T\)](#)
  - [Deploy the appliance \(NSX-V\)](#)

Starting in Deep Security 12.5.985 or Deep Security 20, Network Service Insertion feature (SI) in NSX-T is supported. This enhancement allows Guest Introspection (GI) and Service Insertion (SI) to co-exist when Deep Security registers with NSX-T. Some key items to take note of related to (SI) integration:

- Transport zone is required in NSX-T deployment if you are using Guest Introspection only or both Guest Introspection and Network Introspection renamed (SI – Service Insertion).

- NSX-T 3.0 has existing default Transport Zone. You can also choose to use existing Overlay Transport Zone.
- Physical NIC connected to (Fabric > Profiles > Transport Node Profiles) is not required if you are using Guest Introspection only. Physical NIC connection is needed only for SI (Service Insertion).

## B. Other recommendations

In agentless anti-malware environments, file scanning takes place on Deep Security Virtual Appliance because there is no agent on the endpoint.

Deep Security Virtual Appliance uses the conventional scanning method (recommended) that does not use Smart Protection Server. The web reputation feature is used by Deep Security Virtual Appliance. When someone tries to access a URL on the VM, the rating of that URL is checked by Deep Security Virtual Appliance first to ensure the URL is not malicious. To check the rating of the URL, Deep Security Virtual Appliance sends that query to the Smart Protection Server.

Smart Protection Network is globally available online courtesy of Trend Micro. By default, Deep Security Virtual Appliance uses it. See [URLs accessed by Deep Security](#) for the complete list of URLs that Deep Security needs to access. Confirm that the URLs are allowed on your company firewall or proxy.

To avoid internet traffic going to the global servers, install a local standalone Smart Protection Server 3.1 or later.

### 3.1.4 Database

#### A. Deployment considerations

- Deep Security Manager must be co-located on the same network as its database, with the connection speed of 1 GB LAN or greater. Connections over WAN are discouraged.  
Deep Security Manager relies on the database to function. Any increase in latency can have a serious negative impact on Deep Security Manager's performance and availability.
- Dedicate a database server to a separate machine.
- Database VM setting recommendations:
  - Use vmxnet3 as vnic driver
  - Use Paravirtual SCSI as vdisk controller
  - Use Thick Eager Zero Disk
- Microsoft SQL Enterprise or Oracle Enterprise are recommended. Microsoft SQL Server Express is supported only in very limited deployments with Deep Security 10.0 Update 2 or later (for details, see [Microsoft SQL Server Express considerations](#)).

Microsoft SQL Enterprise Server:

- Create the Deep Security Manager database in SQL prior to installation.
- Ensure that the remote TCP connection is enabled in your database server. Refer to [How to: Enable the TCP/IP Protocol for a Database Instance](#) in the Microsoft documentation.
- The database account to be used should have db\_owner rights for the Deep Security Manager database.
- The dbcreator server role is required if multi-tenancy is used.

- Set the database with a simple recovery model. Refer to [View or Change the Recovery Model of a Database \(SQL Server\)](#) in the Microsoft documentation.

Oracle Database Server:

- Ensure that the Oracle Listener service is started and accepts remote TCP connections on your database server.
- Create the \*'dsm' database user. Any other user name can be used.
- Grant the CONNECT, RESOURCE roles and the UNLIMITED TABLESPACE privilege to the user 'dsm'.
- Assign the CREATE SEQUENCE, CREATE TABLE, and CREATE TRIGGER system privileges to the user 'dsm'.
- If you plan to use multi-tenancy, grant the CREATE USER, DROP USER, ALTER USER, GRANT ANY PRIVILEGE, and GRANT ANY ROLE system privileges to the user 'dsm'.

For PostgreSQL recommendations, see [PostgreSQL recommendations](#) in the Deep Security Help Center.

- Connecting to the database through TCP/IP channel is recommended.

In situations where the use of named pipes is required to connect to the SQL Server, a properly authenticated Microsoft Windows communication channel must be available between Deep Security Manager's host and the SQL Server host.

This might already exist if:

- The SQL Server is on the same machine as Deep Security Manager.
- Both servers are members of the same domain.
- A trust relationship exists between the two servers.

If no such communication channel is available, Deep Security Manager fails to communicate with the SQL Server over named pipes.

- Make sure the correct connection settings are used during installation. When the Deep Security Manager installer prompts you for the database connection details, enter the database hostname under **Hostname** and the pre-created database for Deep Security under **Database Name**.

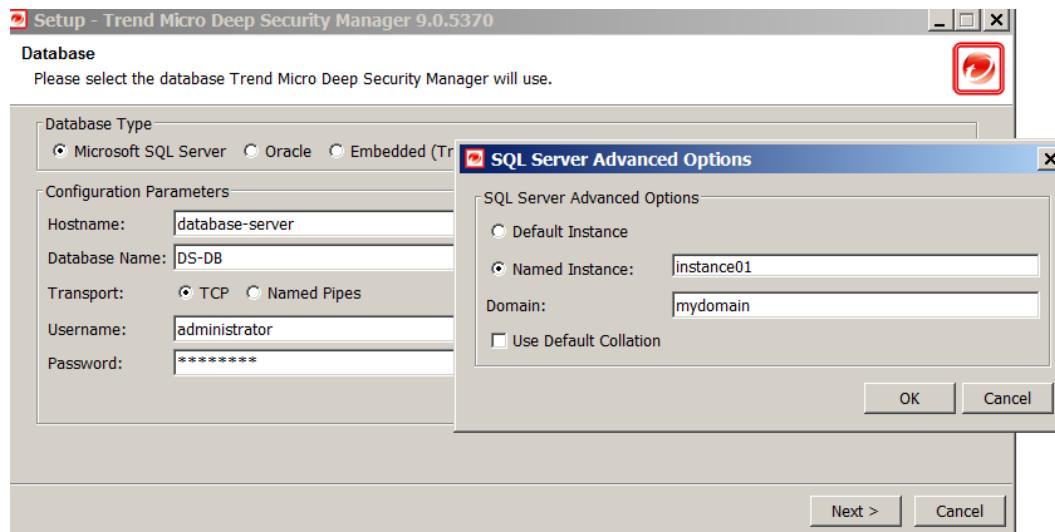


Figure 9: Connecting to SQL instance

The installation supports both SQL and Windows Authentication. If you're using Windows Authentication, click **Advanced** to display additional options. The preceding illustration is an example of connecting to a named SQL instance using Windows Authentication.

Note that connecting to the database server using a Windows Domain Account (Windows Authentication) requires Kerberos Authentication. Make sure the account SPN is configured correctly in Active Directory. See [SQL Server domain authentication](#).

- For Oracle, avoid using special characters for the database user. Although Oracle allows special characters when configuring the database user object, Deep Security does not support special characters for the database user.
- For Microsoft SQL Server, keep the database name short, particularly if multi-tenancy is planned for the environment. A short name for the main database makes it easier to read the database names of your tenants. For example, if the main database is MAINDB, the first tenant's database name will be MAINDB\_1, the second tenant's database name will be MAINDB\_2, and so on.
- For PostgreSQL recommendations, see [PostgreSQL recommendations](#) in the Deep Security Help Center.
- For security, your account and password for the database might have an expiration. In this case, you can follow the instructions provided in [Changing the Deep Security Manager \(DSM\) database credentials and port](#) to change the account and password for the database in Deep Security Manager.
- To avoid deadlocks, a new Deep Security installation by default sets READ\_COMMITTED\_SNAPSHOT to On when installing using Microsoft SQL server. If it is an upgrade, set READ\_COMMITTED\_SNAPSHOT to On in your database.

### 3.2 VMware components



Figure 10: VMware Components

#### A. Deployment considerations

- Ensure the latest security patches are applied to vCenter, ESXi, and NSX Manager.  
For version compatibility details, refer to the [Deep Security and VMware compatibility matrix](#).
- Ensure all VMware components are tied to an NTP server. It is recommended to use the same NTP server for the entire environment, and that they are all synchronized.
- To deploy NSX, the OVA package can be downloaded from VMware's website:  
NSX-V:  
[https://my.vmware.com/web/vmware/info/slug/networking\\_security/vmware\\_nsx\\_data\\_center\\_for\\_vsphere\\_6\\_x](https://my.vmware.com/web/vmware/info/slug/networking_security/vmware_nsx_data_center_for_vsphere_6_x)

NSX-T:

[https://my.vmware.com/web/vmware/info/slug/networking\\_security/vmware\\_nsx\\_t\\_data\\_center/2\\_x](https://my.vmware.com/web/vmware/info/slug/networking_security/vmware_nsx_t_data_center/2_x)

It is suggested to use VMware NSX Manager 6.4 or later / VMware NSX-T 3.0 or later for Deep Security 20 LTS. For details, refer to [System requirements](#) in the Deep Security Help Center.

If you are using NSX free license, there is no need for Host Preparation before deploying Deep Security Virtual Appliance.

- Login credentials with access to vCenter and NSX Manager are required when connecting the components to Deep Security. Always remember to update the connection details in Deep Security each time the password for these accounts change to avoid synchronization issues. This can be done via DSM > Computers > right-click on vCenter > Properties. For more details on the permissions, refer to [Permissions required for Deep Security Virtual Appliance \(DSVA\) deployment and operations](#).

**NOTE** If vCenter is installed on Windows, Update Manager must be enabled.

- Deploying the Guest Introspection driver on VMs

- For VDI environments, enable the driver in the golden image.
- Verify on random VMs to ensure these drivers are running command in command prompt:
  - sc query vsepfl
  - sc query vmci

- Multiple vCenters

Deep Security supports multiple vCenter servers. Virtual Machine UUIDs must be unique across all vCenter instances. For example, adding a VM to the inventory on multiple vCenter servers can result in duplicate UUID issues. If you're using Linked Mode, each linked vCenter server must be added individually to Deep Security Manager.

- Keep Deep Security Manager and Deep Security database in the same ESXi Host using VM/Host Rules at Cluster Settings



Figure 11: Keep Virtual Machines Together

### 3.3 Supported deployment models

#### 3.3.1 Standard small scale deployment

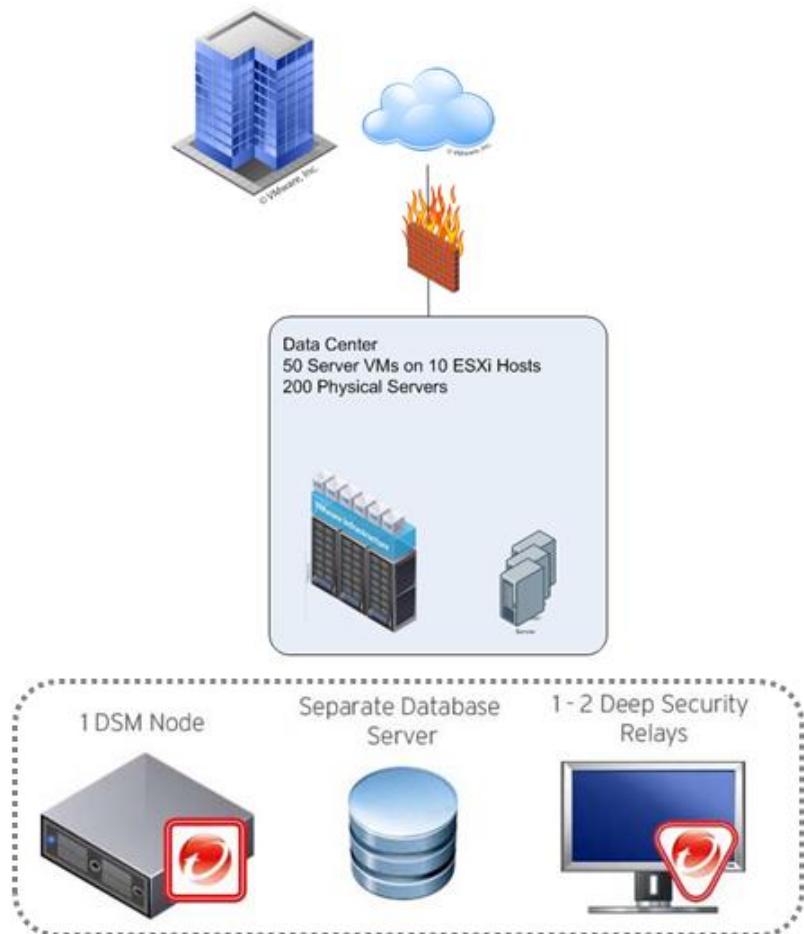


Figure 12: Standard Small Scale Deployment

For small standard deployment, the best practice is to have the following:

- Two Deep Security Manager nodes, for redundancy (only one node is shown in Figure 11).
- The database is installed on a separate machine.
- Both Deep Security Manager and the database are located in the same datacenter.
- There are one to two Deep Security Relays for updates.
- A 10-minute heartbeat is used for all systems.

Refer [Heartbeat](#) for additional details on heartbeats.

### 3.3.2 Medium scale deployment with VPN users

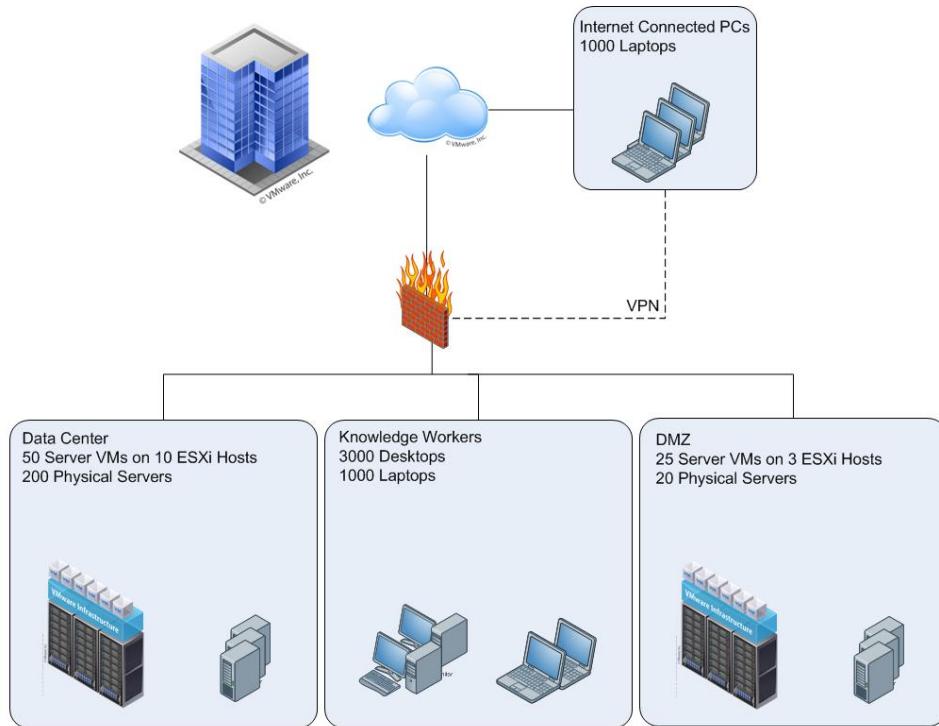


Figure 13: Remote systems connect to VPN regularly

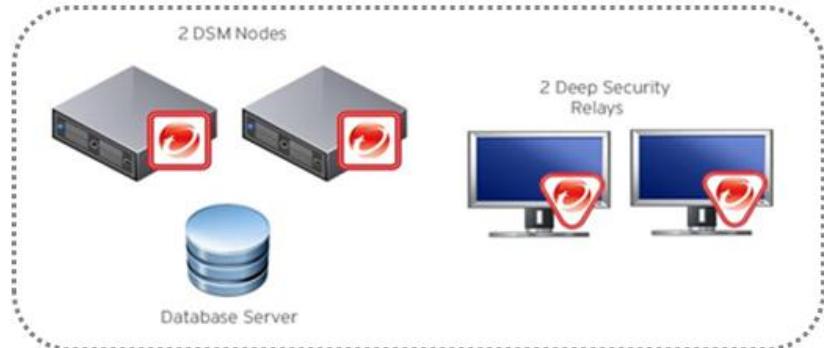


Figure 14: Medium Scale Deployment

For medium scale deployment, the best practice is to have the following:

- Two Deep Security Manager nodes for redundancy.
- Deep Security Manager and broadband both located in the datacenter.
- Bi-directional communication.
- Two relays for updates.
- 10-minute heartbeat for servers.
- 60-minute heartbeat for desktops and internal laptops.
- 10-minute heartbeat for remote laptops (may vary; heartbeat frequency needs to be less than the average VPN session frequency).

Refer to [Heartbeat](#) for additional details on heartbeat and communication methods.

### 3.4 Testing Deep Security

Validate and test Deep Security features and functionality after deployment. Refer to the [Testing the Deep Security modules](#) article for guidelines on testing each module of Deep Security. That article also provides the procedure for testing the integration with VMware, Active Directory, and SIEM tools, along with failover/high availability tests and scenarios:

## 4 Upgrade and migration

### 4.1 Deep Security Manager upgrade recommendations

- Before upgrading Deep Security Manager, create a full backup of the Deep Security Manager database. In the rare event that there is difficulty in upgrading, this allows you to roll back by installing the previous manager (with a temp database) and re-pointing it at the restored database (in `dsm.properties`).
- Check your System Events and Security Events Log Retention settings, reduce the log retention to a minimum based on your organization's need. This helps reduce the size of the database tables and reduce the amount of time needed to update the database schema.
- Perform the upgrade on non-peak or low-peak hours.
- For multi-node Deep Security Manager, upgrades must be done on all Deep Security Manager nodes. For example, you must upgrade the Deep Security Manager node 1, then node 2, and then node 3. All nodes must run on the same version prior to upgrade.
- If a previous version of Deep Security Manager is installed on your system, choose between **Upgrade the existing installation** and **Overwrite the existing installation**:
  - Upgrading the installation upgrades Deep Security Manager to the latest version, but does not overwrite your policies, such as intrusion prevention rules, firewall rules and application types, or change any of the security settings being applied to the computers in your network.
  - Overwriting the existing installation erases all the data associated with the previous installation and then installs the latest parameters for filters, rules, policies and others.
- In a Marketplace Multi-Tenant environment:
  - When the installer runs and detects an existing installation, it offers an upgrade option. If upgrade is selected, the installer notifies other nodes to shut down and then begins the process of upgrading.
  - The primary tenant is upgraded first, followed by the tenants in parallel (five at a time). Once the installer finishes, the same installer package would be executed on the rest of the Deep Security Manager nodes.
- For environments with large databases, schema modification during an upgrade can take a significant amount of time (8 or more hours), so plan accordingly.

### 4.2 Migration NSX-V to NSX-T

For instructions on how to migrate from NSX-V to NSX-T, see [Migrate an agentless solution from NSX-V to NSX-T](#) in the Deep Security Help Center.

### 4.3 Upgrade Deep Security Virtual Appliance

For instructions on how to upgrade Deep Security Virtual Appliance, see [Upgrade Deep Security Virtual Appliance](#) in the Deep Security Help Center.

## 5 Configuration

Deep Security is a modular solution that can be adapted to different environments, so there is no right or wrong way to configure the product. Below are some common settings, exclusions, and other helpful configurations that appear in most Deep Security deployments. Double-check with your company's policies before adapting these recommendations.

### 5.1 UI configurations

#### 5.1.1 Dashboard

It is recommended that at least the following widgets are included and placed on the area best seen on the dashboard page:

- Alert Status – Keeps you informed of any critical items that might need immediate attention such as security updates and protection on computers going offline.
- Computer Status – Gives you a good overview of agents' status.
- My Account Status – Shows information about the user currently logged in.
- Security Update Status – Shows information about out-of-date vs. up-to-date agents.

Create multiple dashboards and group them by usage (that is General, Anti-Malware, Updates and others) for easier management of large-scale environments. Administrators can easily switch between them from the tabbed view. Each dashboard has a different time and computer filter, allowing multiple views into the system.

#### 5.1.2 Alerts

By default, most alerts are enabled. In large environments, it can be beneficial to remove some alerts so only the ones that require action are triggered. Alerts should be configured to give the most relevant information, so the proper actions can be taken. From the alerts page, **Configure Alerts** can be selected to enable or disable alerts.

#### 5.1.3 Policies

Policies replicate security settings to servers and desktops that share similar security requirements. It is recommended that machines with similar settings, software installed, application, or function be grouped strategically when assigning policies.

Note that the default policies built in Deep Security are meant to be examples and should not be used without prior configuration.

##### A. Policy-level vs. Computer-level rule and configuration assignment

The best practice is to assign most rules through Policies for ease of management.

The advantages of using Policies are as follows:

- It allows you to change or test the policy settings before assigning it to the machines.
- It allows a quick removal of rules and configuration by simply taking out a machine from the policy or assigning it an entirely new one.
- It duplicates the policy and uses it as a baseline setting for future policies to be created.

You should use the Computer Level rule assignment when:

- Leveraging automatic assignment
- There are many varying computers (that is, each machine uses different applications, different OS updates, and so on, so they are virtually impossible to group)

**NOTE** When using a combination of policy and computer level assignments, keep in mind that when you unassign a policy from a computer, rules might still apply. This occurs if the rules were assigned independent of the policy.

## B. Policy groupings

The following are some recommended machine groupings to effectively take advantage of policies:

- By Operating System (for example, Windows 2008 Servers, Windows XP Machines, and Linux)
- By Server Function (for example, Mail Servers, Web Servers, User Laptops, and Point of Sale Systems)
- By Application installed/version (for example, OfficeScan Servers, Oracle 10 Database Servers, MS SQL 2005 Servers)

Properly grouping the machines is essential to effectively managing recommendation scans.

When a recommendation scan is performed on an individual member of a policy, the recommendations for that agent (Deep Security Agent) are seen on the policy as well.

Accepting or applying the recommendations at the policy level applies the rules to all members of the policy. The advantage of this method is the ease of maintenance. However, the disadvantage is that unnecessary rules might be assigned to certain members. For this reason, it is recommended to group the machines accordingly to avoid the vulnerability being triggered for machines that should not be affected.

**NOTE** Deep Security 10 supports multiple levels of policy inheritance. A newly created policy can be configured to inherit all or some of its settings from a parent policy. It lets you create a tree structure of security policies. For example, you can create a parent policy called Windows Server and two child policies - Windows Server 2008 and Windows Server 2003 - inherited from their parent policy. Each child policy can have child policies of their own for different editions of Windows Server.

Sample Policy grouping with policy inheritance:

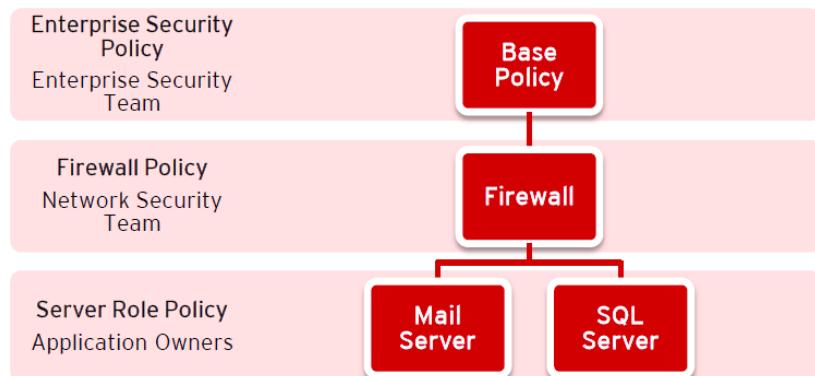


Figure 15: Policy inheritance

### C. Policy names

As a best practice, use a naming convention for policies to manage multiple policies more easily.

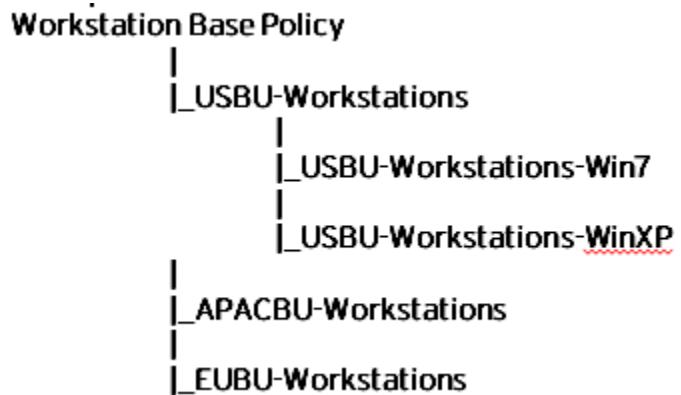


Figure 16: Sample of Naming Convention

#### 5.1.4 Smart folders

When using the Smart Folder function, be sure to identify Computer Name and Display Name correctly.

## 5.2 Module configurations

### 5.2.1 Anti-Malware

#### A. Configuration

Go to **Policies > Common Objects > Other > Malware Scan Configuration > Scan Settings**.

Recommended Real-Time Scan Configuration	
General	Recommendation
Document Exploit Protection	Enabled
Predictive Machine Learning	Enabled***
Behavioral Monitoring	Enabled***
Spyware / Grayware	Enabled
Enable IntelliTrap*	Disabled
Alert when ...	Enabled
Inclusions	
Files to Scan	All Files
Directories to Scan	All directories
Actions	
Active Action	Disabled
Custom Actions:	Enabled
For Virus	Clean
For Trojans	Quarantine
For Packer	Quarantine
For Spyware	Quarantine
For CVE Exploit	Quarantine
Aggressive Detection Rule	Pass****
For Other Threats	Quarantine
Possible Malware upon Detection	ActiveAction
Advanced	
Scan Compressed Files	Enabled
Maximum size of individual extracted files	Customized Size
Maximum Levels	2
Maximum number of files to extract	10
Scan Embedded Microsoft Office Objects	Enabled
Scan for Exploit Code in Microsoft Office Objects	Enabled
OLE Layers to Scan	3
Enable Network Directory Scan	Enabled**
Scan Files When	Read/Write

Table 2: Real-Time Scan Configuration

\* IntelliTrap helps block real-time compressed executable files and pairs them with other malware characteristics. Since IntelliTrap identifies such files as security risks and might incorrectly block safe files, you can disable IntelliTrap if users regularly exchange real-time compressed executable files. IntelliTrap only works in Real-Time mode.

\*\* Network scanning should be disabled to maintain maximum performance during Real-Time Scan. However, these network resources must be protected by a local anti-virus scanner. Leave enabled if there is no other file scanner for these network shares.

\*\*\* Test on your staging environment first, before applying Enhanced Security features to your production environment. In the latest Deep Security Agent version, there is also a custom action for Behavioral Monitoring and Predictive Machine Learning. You can switch the action to pass when first enabling this functionality to avoid unexpected impact and avoid the risk of important applications being blocked. Allow the enhanced security features to run for a few days and review the Anti-malware detection events. Create process exclusion as needed if there are any legitimate applications triggering Behavioral Monitoring or Predictive Machine Learning events. Some events related to enhanced security features appear with malware name such as Possible Malware or HEU\_AEGIS\_CRYPT.

\*\*\*\* This action is used in conjunction with Malware Scan Configuration setting **Scan for exploits against known critical vulnerabilities and aggressive detection of unknown suspicious exploits**, which detects more issues but may also result in more false positives. If suspicious files are detected, they can be submitted to Deep Discovery Analyzer. See [Connected Threat Defense](#) for more information.

Recommended Scheduled Scan Configuration	
General	Recommendation
Files to Scan	All Files
Directories to Scan	All directories
Actions	
Active Action	Disabled
Custom Actions:	Enabled
For Virus	Clean
For Trojans	Delete
For Packer	Quarantine
For Spyware	Quarantine
For Cookie	Delete
For Other Threats	Quarantine
Possible Malware – Upon Detection	Quarantine
Options	
Enable Spyware / Grayware Scan	Enabled
Scan Compressed Files	Enabled
Maximum size of individual extracted files	Customized Size
Maximum Levels	3
Maximum number of files to extract	10

Scan Embedded Microsoft Office Objects	Enabled
Scan for Exploit Code in Microsoft Office Objects	Enabled
OLE Layers to Scan	3
CPU Usage	Medium
Alert when...	Enabled

Table 3: Scheduled Scan Configuration

Recommended Manual Scan Configuration	
General	Recommendation
Files to Scan	All Files
Directories to Scan	All directories
Actions	
Active Action	Disabled
Custom Actions:	Enabled
For Virus	Clean
For Trojans	Delete
For Packer	Quarantine
For Spyware	Quarantine
For Cookie	Delete
For Other Threats	Quarantine
Possible Malware – Upon Detection	Quarantine
Options	
Enable Spyware / Grayware Scan	Enabled
Scan Compressed Files	Enabled
Maximum size of individual extracted files	Customized Size
Maximum Levels	2
Maximum number of files to extract	10
Scan Embedded Microsoft Office Objects	Enabled
Scan for Exploit Code in Microsoft Office Objects	Enabled
OLE Layers to Scan	3
CPU Usage	High
Alert when...	Enabled

Table 4: Manual Scan Configuration

If the Clean action fails, the secondary action is Quarantine.

If the Quarantine action or Delete action fails, the system's or the user's attempt to interact with the file in any way is denied during a real-time scan.

## B. Scan schedule setting

In addition to scan configurations, you can also set up a Real-Time Scan schedule. This can be useful if there is a specific timeframe in which you would like to disable real-time scanning to improve performance.

Sample Scenario:

File Server is scheduled to have a backup of all files every day at 2:00am - 4:00am.

This server most likely has high activity during this time, and allowing listing in the 2:00 AM - 4:00 AM timeslot from Real-Time Scan activity would significantly help improve performance for both the backup task and server resource.

**NOTE** Perform a full manual scan on a server before running the actual backup task. It is recommended that weekly scheduled scans are performed on all protected machines.

## C. Multi-threaded processing

Real-Time Scan uses multi-threaded scans by default. However, for on-demand and scheduled scans, this option needs to be configured, depending on the environment.

Go to **Policy/Computer > Anti-Malware > Advanced > Resource Allocation for Malware Scans**.



Figure 17: Resource Allocation for Malware Scans

Enable the option for physical machines using the physical Deep Security Agent to improve the performance. Note that restarting the machine is required for any change to take effect.

These are cases when this setting should not be enabled:

- Agentless environments.
- If multi-threading is not an option, since the machine resource is limited (common for CPU-bound tasks).
- When a resource should be held by a single operator only at a time (common for IO-bound tasks).

## D. Quick Scan vs. Full Scan

Quick Scan improves the agent-based (Windows only) scanning time. It enables scanning for only critical files that are most likely to be infected. This allows more frequent quick scans to be scheduled with lesser impact. It also allows full scans to be performed on a less frequent basis (such as weekly).

Full Scan:

- Runs a full system scan on all processes and files.
- Uses the configuration set under manual scan (scans the files based on directories, extensions, files configured to be included in the scan).
- Runs at scheduled times by creating a scheduled task or manual scan (on-demand).

- Runs on all platforms supporting anti-malware.
- Takes longer to complete.

Quick Scan:

- Provides a fast, high-level scan of critical system areas for currently active threats.
- Looks for currently active malware but does not perform deep file scans to look for dormant or stored infected files.
- Is significantly faster than a Full Scan on larger drives.
- Is only available for Windows Agent-based systems.
- Has no configurable settings and does not use any scan configuration (does not check settings such as Directories to Scan or Files to Scan).
- Is only available on-demand. Quick Scans cannot be scheduled as part of a task.

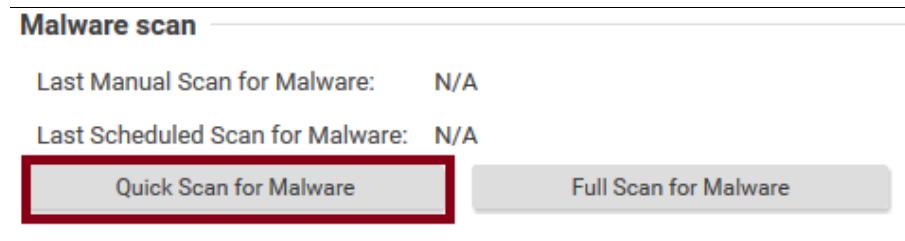


Figure 18: Quick Scan for Malware

## E. Scan cache

This feature is used by Deep Security Virtual Appliance to maximize the efficiency of malware and integrity monitoring scans of virtual machines by enabling a re-duplication of scanning in malware and integrity monitoring scans. This increases the performance on scan times for subsequent scans of similar VMs (such as virtual desktop infrastructure (VDI) linked clones).

Scan cache:

- Works best when VMs are linked clones (VDI is a prime case).
- Prevents scanning identical files twice.
- Is stored in the Deep Security Virtual Appliance memory.
- Information is not transferred when a VM is vMotioned to another host to avoid conflicts with the target cache. The target Deep Security Virtual Appliance's cache applies to the newly migrated VM.

To modify the scan cache configurations:

1. On the Deep Security Manager console, go to **Administration > System Settings > Advanced**.
2. Click **Scan Cache Configurations > View Scan Cache Configurations**.
3. Configure the following settings:
  - Anti-Malware Real-Time Scan Cache : 15 Minutes
  - Anti-Malware On-Demand Scan Cache: 1 Day
  - Integrity Monitoring Scan Cache: 1 Day

Remember when changing the cache values:

- Shorter expiry period on cache means it is refreshed more frequently. Consider setting it to a lesser value to increase security.
- Create dedicated Scan Cache policies for VMs that you want to separate and have their own Scan Cache. This is appropriate for different departments sharing the same infrastructure.
- If you have a lot of VMs per host (VDI environment), monitor the disk I/O and CPU usage during scanning. If the scanning time is too long, consider increasing the size of the cache or adjusting the scan cache settings to achieve the required performance.
- If cache size needs to be increased, you can adjust Deep Security Virtual Appliance system's memory accordingly.

When to use the Update Sequence Number (USN) Setting:

With this setting enabled, Deep Security can check the USN value of a file. During real-time scans, it reads partial content of files to determine if the files are identical.

For more information, see [Change Journals](#) in the Microsoft documentation.

This setting reduces the performance and usually needs a greater cache setting. Only use this setting if stronger security is required.


Specific Scan Cache Settings for VMs and Policies can be changed under:

- **Policy > Anti-Malware > Advanced > VM Scan Cache**
- **Policy > Integrity Monitoring > Advanced > VM Scan Cache**

## F. Scan exclusions

In Deep Security 20, you can run the following command on the agent locally to get the top 1000 files scanned the most on the computer. Currently, this is only applicable to Windows agents.

```
dsa_control -AmTopNScan
```

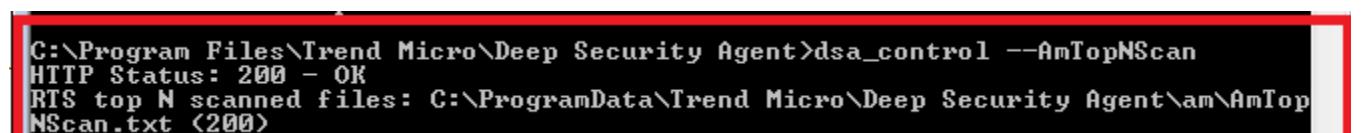

```
C:\Program Files\Trend Micro\Deep Security Agent>dsa_control --AmTopNScan
HTTP Status: 200 - OK
RTS top N scanned files: C:\ProgramData\Trend Micro\Deep Security Agent\am\AmTopNScan.txt <200>
```

It creates a text file with file information in it.

```

Recent Places AmTopNScan
Libraries AmTopNScan - Notepad
File Edit Format View Help
Top 10 Scanned File [1]:
Name = C:
Count = 10
LastScanDuration (μs) = 58
Top 10 Scanned File [2]:
Name = C:\windows\Prefetch\NO
Count = 6
LastScanDuration (μs) = 1087
Top 10 Scanned File [3]:
Name = C:\windows\Prefetch\DL
Count = 6
LastScanDuration (μs) = 2685
Top 10 Scanned File [4]:
Name = C:\windows\Prefetch\VM
Count = 5
LastScanDuration (μs) = 955
Top 10 Scanned File [5]:
Name = C:\Users\Administrator
Count = 4
LastScanDuration (μs) = 660

```

You can run the command to collect the agent diagnostics, and it includes this file inside the agent diagnostic ZIP file.

dsa\_control -d

```

C:\Program Files\Trend Micro\Deep Security Agent>dsa_control -d
HTTP Status: 200 - OK
Create diagnostic package done.
path = C:\ProgramData\Trend Micro\Deep Security Agent\diag
file name = 1572948798.zip

```

The Directory Lists, File Extension Lists, and File Lists can be set in the **Common Objects** section of **Policies** tab.

Figure 19: Directory, File Extension, and File Lists

These lists are then referenced on the **Exclusions** tab in **Malware Scan Configurations**.

Figure 20: Exclusions tab of Malware Scan Configuration

Use this list as a starting point and refine it based on your environment and paths.

General Exclusions and Excluding Windows Update or Automatic Update Files:

Files:

```

pagefile.sys
NTUser.pol
registry.pol
${Windir}\Software Distribution\Datastore\DataStore.edb
${Windir}\Software Distribution\Datastore\Logs\Edb*.log
${Windir}\Software Distribution\Datastore\Logs\Res1.log
${Windir}\Software Distribution\Datastore\Logs\Res2.log
${Windir}\Software Distribution\Datastore\Logs\Edb.chk
${Windir}\Software Distribution\Datastore\Logs\tmp.edb
${Windir}\Software Distribution\Datastore\Logs\hiberfil.sys
${Windir}\Software Distribution\Datastore\Logs\pagefile.sys
${Windir}\Software Distribution\Datastore\Logs\Edbres00001.jrs
${Windir}\Software Distribution\Datastore\Logs\Edbres00002.jrs
${Windir}\Security\*.edb
${Windir}\Security\*.sdb
${Windir}\Security\*.log
${Windir}\Security\*.chk

```

Directories:

```
 ${allusersprofile}\  
 ${Windir}\system32\GroupPolicy\  
 ${Windir}\Cluster\
```

Extension Exclusions:

```
 pst  
 mdf  
 ldf  
 db
```

## Microsoft Windows Server Domain Controllers

Files:

```
 TEMP.edb  
 EDB.chk
```

Directories:

```
 ${Windir}\SYSVOL\  
 ${Windir}\NTDS\  
 ${Windir}\ntfrs\  
 ${Windir}\system32\dhcp\  
 ${Windir}\system32\dns\
```

## Microsoft SQL Server

Large databases should not be scanned because it might hinder performance. Since Microsoft SQL Server databases are dynamic, exclude the directory and backup folders from the scan list.

Directories:

```
 ${ProgramFiles}\Microsoft SQL Server\MSSQL\Data\  
 ${Windir}\WINNT\Cluster# if using SQL Clustering  
 Q:\# if using SQL Clustering
```

## File Servers

Access to files over shared drives can degrade performance. To scan some file types, only a fraction of content is required. Other file types require a full scan or even a decompression.

Trend Micro recommends that file servers are excluded from scanning and perform scanning on the local file server itself. With exclusions in place, there is no need to scan the file as it is accessed, which increases performance.

It is also recommended to use agent protection for file servers for better performance.

**NOTE** If there are any custom applications not mentioned here, contact the software vendor to get their recommended scan exclusions. You can also refer to [Recommended scan exclusion list for Trend Micro Endpoint products](#).

### G. Quarantine settings:

With agentless anti-malware feature, quarantined files are stored in Deep Security Virtual Appliance, so enough free space must be available on a Deep Security Virtual appliance disk.

The default quarantined file settings are the recommended settings. To access the settings, go to **Deep Security Manager > Policy > Anti-malware > Advanced**.

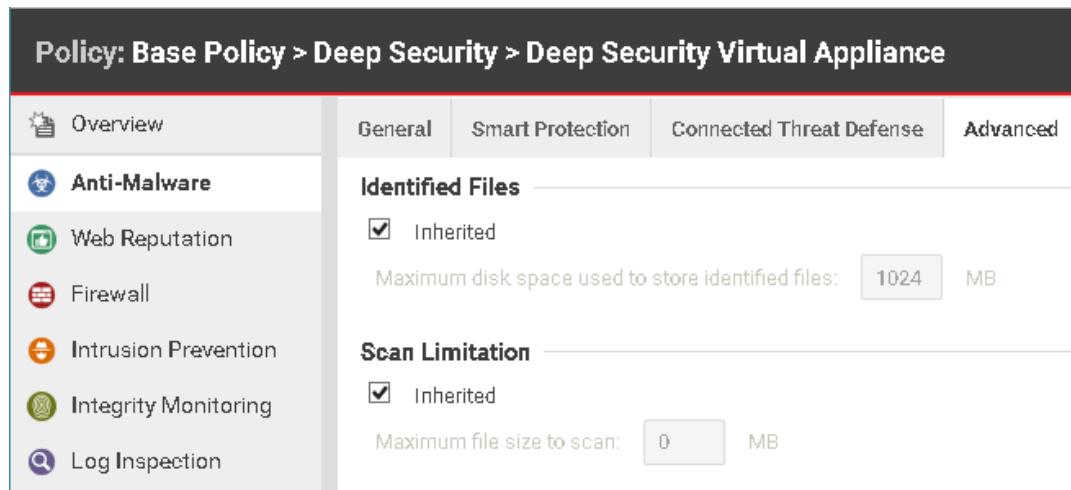


Figure 21: Advanced Anti-Malware Settings

**Maximum disk space used to store quarantined files:** This represents the maximum space that Deep Security Manager sets aside for Deep Security Virtual Appliance. Files from all protected virtual machines (VMs) must share this space.

**Maximum file size to scan:** Files exceeding this file size are not scanned. Setting a value of 0 means it scans to the maximum allowable size by the Scan Engine.

Quarantined files are automatically deleted from Deep Security Virtual Appliance under the following circumstances:

- If a VM undergoes vMotion, quarantined files associated with that VM are deleted from Deep Security Virtual Appliance.
- If a VM is deactivated from Deep Security Manager, quarantined files associated with that VM are deleted from Deep Security Virtual Appliance.

- If a Deep Security Virtual Appliance is deactivated from Deep Security Manager, all the quarantined files stored on that Deep Security Virtual Appliance are deleted.
- If a Deep Security Virtual Appliance is deleted from the vCenter, all the quarantined files stored on that Deep Security Virtual Appliance are deleted.

## H. Maximum performance configuration for anti-malware

To maximize the performance of the anti-malware feature, the following actions are recommended:

- Enable the scan cache and change the cache time based on your real situation.
- Use Scan files during Read for file scanning.
- Add UNC path in the exclusion list. At the same time, check that the real-time scan is enabled so that all VMs are being protected.
- Set up the proper exclusion list to exclude the folder, file, or extensions.
- Set the scan limitation to prevent scanning a file larger than the specified size.
- Disable **Network Directory Scan**. If you have anti-malware protection on all computers, scanning files over the network can lead to double scanning.
- Leverage Process Image Exclusion List to exclude application processes that handle large number of transactions.

### Read vs Write

Read:

The system scans the virus when reading any files. This means you might download a test virus to your disk and until someone wants to run it, the system can catch the test virus when any file events are reading.

Write:

Write is important, but it affects the performance. Some FTP clients and browsers download a file by splitting the body to several pieces.

For example: Download a 100 MB file.

The browser can download 1 MB each time (write 1 MB and close the file, write another 1 MB and close the file and so on until the entire file has been downloaded). This means the file must be scanned 100 times. The worst-case scenario is if the malware hides itself in the last bytes. If there is no scan on write and the file is malware, it could be safe because it has been put on the disk without execution. It can be scanned when it starts to be launched (read) and prevent its execution if a malware is found.

Write might detect malware in time, but it greatly affects the performance.

## I. Enhanced security features

This section describes the anti-malware functionality related to Behavioral Monitoring and Predictive Machine Learning.

### Server Platforms

Server platforms use the Default Real-Time Scan Configuration. Starting with Deep Security Manager 20.0.313, the Default Real-Time Scan Configuration enables both Behavior Monitoring and Predictive Machine Learning. There is also a new **Action to take** setting, where you can configure the scan action to either be **Active Action** or **Pass** (default).

#### A. Change affecting Deep Security Manager configuration for Default Real-Time Scan Configuration.

When you upgrade to Deep Security Manager version 20.0.313, there are configuration changes that take effect automatically in the Default Real-Time Scan Configuration. Behavior Monitoring and Predictive Machine Learning are both enabled automatically and the **Action to take** option is set to **Pass**. This configuration offers the best protection while reducing the impact the feature may have on running applications.

This change only affects your Behavior Monitoring and Predictive Machine Learning settings if they were previously disabled. This change does not affect customers who have either Behavior Monitoring or Predictive Machine Learning already enabled.

## B. Change affecting Deep Security Agent

Behavior Monitoring and Predictive Machine Learning with Pass action is a new feature that works only with the following agent versions:

- Deep Security Agent for Windows 20.0.0-1559 or later
- Deep Security Agent for Linux 20.0.0-1822 or later

For earlier agent versions, the Pass action is not supported. Behavior Monitoring and Predictive Machine Learning are disabled if **Action to take** is configured to **Pass**.

To enable Behavior Monitoring on the server platform:

1. Test on your staging environment first, before applying to your production environment.
2. Set the Behavior Monitoring action to **Pass** at first (available in Deep Security Manager version 20.0.313 and later).
3. Monitor your critical applications and custom-developed EXE-file (or home-grown Powerbuilder program):
  - i. If there are malware events detected but you investigate and confirm that the identified files are not harmful, you can right-click the malware event and click **Allow** to add the file to the Behavior Monitoring scan exclusion list for the computer or policy.

The screenshot shows the Deep Security Manager interface with the following details:

- Computer:** 10.209.83.74 (Win7x64)
- Anti-Malware Events:** All, No Grouping
- Period:** Last Hour
- Computers:** Computer: 10.209.83.74 (Win7x64)
- Actions:** View, Export, Auto-Tagging, Columns
- Table Headers:** TIME, COMPUTER, INFECTED FILE(S), MALWARE, SCAN TYPE, ACTION TAKEN, MAJOR VIRUS TYPE
- Table Data:** Two entries for February 24, 2021, at 10:34:50 and 10:34:29. The first entry is for file c:\adc\adc1.exe (HEU\_AEGIS\_CRYPT, Real Time, Terminated, Unauthorized Change). The second entry is for file C:\test\Policy085 (WARE\_BEHAVIOR, Real Time, Access Denied, Suspicious Activity).
- Context Menu (highlighted):**
  - Select All (2)
  - Export Selected to CSV...
  - View
  - Add Tag(s)...
  - Remove Tag(s)...
  - Allow** (selected)
  - Computer Details

ii. You can check the scan exclusion list in the policy or computer editor, under **Anti-Malware > Advanced > Behavior Monitoring Protection Exceptions**.

The screenshot shows the 'Behavior Monitoring Protection Exceptions' section of the Trend Micro Deep Security interface. The 'Add' button is highlighted, and the file 'c:\adc\adc1.exe' is listed in the exceptions list. The 'File Hash Calculation' section is also visible, with the 'Inherited' checkbox checked. The 'Predictive Machine Learning Detection Exceptions' section is partially visible at the bottom.

You can add your critical applications to the **Behavior Monitoring Protection Exceptions** list to help avoid false positives and avoid business-impacting issues. On the other hand, if your critical applications are compromised, this also prevents Behavior Monitoring from triggering detections.

**NOTE** If you have added your critical applications to the **Exclusions > Process Image File List**, you do not need to add them to Behavior Monitoring Protection Exceptions. Anti-malware does not monitor all activities on your application if you have added it to the **Process Image File List** exclusion.

4. After verifying that Behavior Monitoring is working properly and does not cause any server issues, configure it to use the Active Action instead of the Pass action.

#### Availability

Security Enhancement protection relies on Trend Micro backend services. If you lose network connection to these backend services, Security Enhancement might not be able to protect you from advanced threats, such as ransomware attacks. Confirm that Trend Micro backend services are reachable from your environment and the proxy configuration is correct.

Security Enhancement relies on monitoring system activities, including file events generated by any process. Security Enhancement detects malicious behavior by tracing these system events. If you change the setting of your **Malware Scan Configuration > Inclusions > Directories to scan** from **All directories** to a specific **Directory List**, then only file events coming from that Directory List are monitored. Monitoring capability outside the Directory List will be lost, and detection capability and protection are lost as well. For example, if you configure Directory List to "C:\MyFolder", a ransomware that has encrypted your files located outside C:\MyFolder are not detected.

#### Air-gapped environments

As described previously, Security Enhancement protection relies on Trend Micro backend services. If you deploy Deep Security in an air-gapped environment, it is recommended to disable Security Enhancement, regardless of the platform. Disabling Security Enhancement in an air-gapped environment should prevent

Anti-malware emit network traffic from attempting to reach out to backend services. It also improves performance.

#### False alert mitigation

If your legitimate program is detected as a malicious program by Security Enhancement, add it to **Behavior Monitoring Protection Exceptions**. You can also add it to **Predictive Machine Learning Exceptions**.

#### Clean malicious program manually

Behavior monitoring, including ransomware protection, cannot quarantine malicious programs. It can only terminate that malicious process, without changing its program files. If a malicious program installs a run key or adds itself to the system schedule task, then it might be launched again after the system reboots or the task is scheduled. Behavior monitoring continues to terminate it periodically.

Once you confirm the program is malicious, delete the program manually to avoid further damage.

### 5.2.2 Web Reputation

The default security level Medium is suitable for most use cases. However, if you want further security, you can adjust it to the High level.

Web Reputation queries go to the Smart Protection Server (if enabled) or to Trend Micro cloud WRS servers. It is recommended to set up a local Smart Protection Server in-house to limit the amount of required internet queries, which can lead to performance degradation.

If you are using products from Websense, be aware that there are potential incompatibilities between Deep Security Web Reputation and Websense's URL filtration. It is recommended to disable the Web Reputation if the protected computer is behind a Websense edge appliance.

If you have specific web pages to allow or block, configure them in the **Exceptions** tab. By default, Web Reputation is enabled to port 80 and 8080. If you have an HTTP proxy server using other ports, configure it in the **Advanced** tab.

1. Create a new Port List from **Shared > Port Lists** including your proxy port (for example, 3128).
2. Choose the created Port List at **Web Reputation > Advanced > Ports**.

Other setting recommendations:

- The **Block pages that have not been tested by Trend Micro** option should not be selected. Otherwise, it could cause false positives.
- Include internal company URLs in the **Allowed** list under **Exceptions**. Wildcards are supported.
- Ensure that your company's firewall or proxy allows traffic going to <https://ds10.icrc.trendmicro.com> when using the global Smart Protection Server.

### 5.2.3 Firewall

Firewall configuration and administration must be performed carefully. There is no single set of rules that can fit all environments. This guide aims to provide the best practices guidelines and recommendations that can be used as references when building your own rules.

## A. Inline vs. Tap mode

Use Inline mode (**Deep Security Manager > Policies > Settings > Network Engine > Network Engine Mode**). When operating Inline, the live packet stream passes through the network engine. Stateful tables are maintained, firewall rules are applied, and traffic normalization is carried out. As a result, Intrusion Prevention rules can be applied to payload content.

Use Inline mode with rules set to **Detect**, when there is a need to test the configuration and rules before deploying them into the production environment. This way, the real-world process of analyzing the traffic takes place without having to perform any action, such as blocking or denying packets.

Running Deep Security in Tap mode is not recommended. It is not the best practice to perform tests or evaluate Deep Security. Traffic patterns in this mode do not represent network behavior, should the administrator decide to switch to Inline mode.

In Deep Security Manager 10.2 or later, a new drop-down menu in Deep Security Manager is available for configuring failure response. Make sure the appropriate options have been switched to (fail open).

Using ratt tool, run the ratt -s var command as follows. The output shows the current configuration.

```
# ratt -s var

CHECK_FO_SYSTEM_FAILURE      ( checkFailOpenSystemFailure ) = 2
CHECK_FO_SANITY_FAILURE      ( checkFailOpenSanityFailure ) = 2
```

## B. Firewall rule actions

Know the difference between the firewall rule actions before creating your rules. Each rule can take one of the following actions:

- **Deny** - Explicitly blocks traffic that matches the rule.
- **Force Allow** - If a packet matches a Force Allow rule, it is passed but still filtered by Intrusion Prevention. No events are logged. This action type must be used for UDP and ICMP traffic.
- **Bypass** - Allows traffic to bypass both Firewall and Intrusion Prevention analysis. It should be created in pairs (for both incoming and outgoing traffic). Use this setting for media-intensive protocols only.
- **Log only** – If a packet matches a Log Only rule, it is passed, and an event is logged. No other action is taken.
- **Allow** – If a packet matches an Allow rule, it is passed, and any other traffic not covered by a rule is implicitly denied. Use this with caution.

## C. Restrictive vs. permissive firewall

Typically, firewall policies are based on one of two design strategies. Either they permit any service unless it is expressly denied, or they deny all services unless expressly allowed. Decide what type of firewall you would like to implement to reduce administrative overhead in terms of creating and maintaining the rules.

Permissive mode (Reactive)

- Permits all traffic by default and only blocks traffic it believes to be malicious based on signatures or other information.
- Easy to implement, however, it provides minimal security and requires complex rules.
- Rarely used, except in cases where you are not using the firewall but want to leverage it to block a port.
- Deny rules are used to explicitly block traffic.

## Restrictive mode (Proactive)

- The recommended best practice from a security perspective.
- Stops all traffic by default, and only allows traffic explicitly permitted.
- If the primary goal of your planned firewall is to block unauthorized access, the emphasis needs to be on restricting, rather than enabling, connectivity.
- Easier to maintain and more secure.
- Allow rules are used only to permit certain traffic across the firewall and deny everything else.

**NOTE** Allow rules explicitly allow traffic that matches it to pass. In addition, it implicitly denies everything else that is not defined. Be careful when creating allow rules without defining the related rules correctly. Doing so can cause it to block all traffic apart from what the Allow rule is created for.

## D. Stateful inspection

Stateful configurations should be used when the firewall is ON.

The Stateful filtering engine inspects and validates each packet on an individual basis, which involves analyzing the packet within the context of traffic history, correctness of the packet's header values, and protocol state transitions. This enables protection against attacks such as denial of service, provided that a default configuration with Stateful TCP/ICMP/UDP is enabled and only solicited replies are allowed.

If the UDP Stateful option is enabled, Force Allow must be used when running UDP servers (like DHCP).

If there is no DNS or WINS server configured for Deep Security Agents, a Force Allow, Incoming UDP Ports 137 rule might be required for NetBIOS.

Stateful logging should be disabled unless required for ICMP/UDP protocols.

## E. Interface Isolation

Interface Isolation allows you to force a computer to use only one interface at a time. This prevents attackers from bridging across two interfaces. It is commonly used to protect wireless laptops.

Configure this via **Policy > Firewall > Interface Isolation**.

- Enter string patterns that matches the names of the interfaces on a computer in order of priority.
- Limit the number of active interfaces to one at any given time.
- It is not recommended to enable this at the global level. Enable it through the policy instead.

**NOTE** Interface patterns accept wildcards such as asterisk (\*) as well as regex expressions.

## F. Other recommendations

- Bypass Rules

Bypass rules operate like force allow but skips the rest of the packet processing pipeline, so intrusion prevention is also skipped. Use this action for traffic that you prefer to allow across both the firewall and intrusion prevention.

It is recommended to create a pair of rules for each type of traffic. For example, create a rule bypassing the incoming traffic (request), and another to bypass outbound traffic (response).

- Rule Priority

Rule priority determines the order in which filters are applied so high priority rules get applied before low priority rules. When actions share the same priority, the order of precedence for rules are Bypass, Force Allow, and Deny. However, a Deny action with a higher priority takes precedence over a bypass action with a lower priority.

Note that Allow rules can only have a priority of 0. Keep this in mind when using Allow rules to implicitly deny traffic (any traffic not matching the Allow rules are denied). This means when a Deny rule is added on the list, it takes precedence over all the existing Allow rules in place. Use **Force Allow** for traffic that should always be allowed (such as ARP).

To simplify the administration of firewall rules, consider reserving certain priority levels to specific actions. For example, apply a default Priority 3 to rules that use Bypass, Priority 2 for Force Allow rules, and Priority 1 for Deny rules. This reduces the potential for rule conflicts.

- ARP Traffic

Always allow ARP. If a computer relies on dynamic ARP, include an appropriate rule to allow ARP. ARP forms the basis of the TCP/IP stack. ARP facilities provide translation from IP addresses to Ethernet addresses, which are essential for sending packets to other systems on the local LAN segment. Without this conversion, there can be no other form of peer-to-peer IP communication.

Deep Security Manager should not instruct a Deep Security Agent to drop ARP packets, unless it is actually desired (configuration uses static ARP tables). To ensure this, follow these guidelines:

- Enable the Trend Micro-provided ARP force allow rule.
- Do not prevent broadcast ARP packets.
- Out Of Allowed Policy

Out of Allowed Policy (Open Port) events can help quickly identify misconfigurations in rules. Generating these events for TCP, UDP, and ICMP advanced settings can assist with building and adjusting your policy.

To configure this, go to **Policy > Firewall > Advanced > Generate Firewall Events for packets that are Out of Allowed Policy**.

- Use Port, IP, and MAC lists

These lists are objects that can be reused by multiple rules. Using these lists in the configuration of multiple firewall rules facilitates configuration changes since only a single common list must be updated. Modifications done on any of the lists are picked up by all the rules where they are used or assigned.

- Number of rules
- Document all firewall rule changes

Avoid assigning more than 300 rules, because doing so can affect system performance.

- Advanced Network Engine settings

Use the **Description** field of the firewall rule to note why, when, and for what purpose the rule was created. Note when and why rules are created and deleted for easier maintenance.

- Advanced Network Engine settings

To configure this, go to **Policies > Policy > Settings > Network Engine > Advanced Network Engine Settings**.

#### **Established Timeout:**

This parameter defines the maximum time an idle connection can be kept. Certain applications can require an active connection for longer, so increase the value when you have such applications and there are Out of Connection events.

#### **Cold Start Timeout:**

Specify the amount of time to allow non-SYN packets that could belong to a connection that was established before the stateful mechanism was started. Increasing this value can avoid an Out of Connection event after restarting Deep Security Agent or deploying a new profile.

#### **Maximum TCP Connections and Maximum UDP Connections:**

Maximum simultaneous TCP/UDP Connections are allowed. Consider heap memory size before adjusting these parameters.

#### **Enable Debug Mode:**

In debug mode, Deep Security Agent and Deep Security Virtual Appliance captures a certain number of packets (specified by the setting Number of Packets to retain in Debug Mode). When a rule is triggered and debug mode is enabled, Deep Security Agent and Deep Security Virtual Appliance keep a record of the last number of packets that passed before the rule was triggered. It returns those packets to Deep Security Manager as **Debug Events**.

#### **Number of Packets to retain in Debug Mode:**

Specify the number of packets to retain and log when the Debug Mode is on.

#### **Log All Packet Data:**

Record the packet data for events that are unassociated with specific firewall or intrusion prevention rules. These are the log packet data for events such as **Dropped Retransmit** or **Invalid ACK**.

#### **Minimum Fragment Size:**

If legitimate traffic is blocked and there are **First Fragment Too Small** firewall events, change its value to 0 to disable the checking.

#### **Minimum Fragment Offset:**

If legitimate traffic is blocked and there are **Fragment Offset Too Small** firewall events, change its value to 0 to disable the checking.

For more tips and information about the Deep Security Firewall, see [Understanding the features of Deep Security firewall](#).

### **5.2.4    Intrusion prevention**

#### **A.    Modifying rules**

Intrusion Prevention (formerly called Deep Packet Inspection) rules should never be modified at the global level (**Deep Security Manager > Policies > Common Objects > Rules > Intrusion Prevention Rules**) because there is no way to restore them. Configuration should be done by overriding the Policy or Computer. This way, the default primary copy of the rules is kept on a global level and can be used as a reference, should there be a need to revert the changes.

Incorrect rules can cause downtime. You can create a rule based on the signature only. For those advanced rules (Start/End/Patterns or XML format), contact Trend Micro Technical Support to obtain a qualified rule.

## B. Using Detect Only or Prevent mode

- If a specific rule is causing false positives, place that rule in **Detect Only** mode or unassign it.
- Any rule requiring configuration should be assigned **Detect Only** mode until the rule can be configured for that computer.
- For new deployments, it is recommended to set rules to **Inline Detect** mode for easier identification of false positives.
- Once the tests and additional configurations have been made, switch a rule to Prevent mode to start blocking the packets that match the rule.

## C. HTTP Protocol Decoding

The HTTP Protocol Decoding filter is the most important filter in the Web Server Common Application Type. This filter is responsible for decoding the HTTP traffic before the other rules inspect it. In addition, this filter allows control over various components of the decoding process.

This rule is required should you choose to use any of the Web Application Common or Web Server Common filters that require it. Deep Security Manager automatically assigns this rule when it is required by other rules. Because each web application is different, the policy that uses this filter should run in detect-only mode for a period of time, before switching to Prevent Mode to determine if any configuration changes are required. Changes are often required to the list of illegal characters.

See the following for more details on this rule and how to tune it:

- [HTTP protocol decoding in Deep Security](#)
- [Modifying the list of URI characters that Deep Security Agent considers illegal](#)
- [Troubleshooting the “Illegal Character in URI” error in Deep Security](#)

## D. Cross-site scripting and generic SQL injection rules

Two of the most common application-layer attacks are SQL injection and cross-site scripting (XSS). SQL injection rules and cross-site scripting intercept most attacks by default. Adjust the drop score for specific resources if they are causing false positives.

Both rules are smart filters that require custom configuration for web servers. If you have output from Web Application Vulnerability Scanners, leverage that information when applying protection. For example, if the user name field on login.asp page is vulnerable to SQL Injection, ensure that the SQL Injection rule is configured to monitor that parameter with a low threshold to drop on.

For more information, see [Understanding the Generic SQL Injection Prevention rule](#).

## E. Filtering SSL data streams

Deep Security Manager supports intrusion prevention analysis of SSL traffic and can filter SSL encrypted data streams. Filtering SSL traffic is only supported by Deep Security Agent, not Deep Security Virtual Appliance. Deep Security Agent does not filter SSL connections that use compression.

This can be assigned and configured on individual computers. Open the **Details** window of the computer you wish to configure and go to **Intrusion Prevention > Advanced > SSL Configurations > View SSL Configurations**.

**NOTE** This might cause a performance impact. It is not recommended for servers with high numbers of connections per second.

If this is activated, you should disable the inspection of HTTP responses to avoid performance degradation. As all web attacks that are protected against are included in the HTTP request and not the HTTP response, disabling inspection on responses improves performance.

To configure this:

- a. Go to the **computer or policy > Intrusion Prevention**.
- b. Select a rule with **Web Server Common** app type, right-click **Application Type > Properties**.
- c. Go to **Configuration** tab and uncheck **Inherited**.
- d. Uncheck **Monitor responses from Web Server**.
- e. Update the changes to the computer/policy.

## F. Other recommendations

- Under **Administration > System Settings > Updates**, select **Automatically apply Rule Updates to Policies**. If this option is not selected, you have to manually apply downloaded rule updates to policies from the **Administration > Updates > Security** page by clicking the **Apply Rules to Policies** button.
- Set the rules to only log dropped packets to save disk space.
- If rules are manually assigned, do not assign more than 300 rules as it affects system performance.
- Use **Recommendation Scan** to apply the necessary rules for the best protection and performance.
- Only select the **Always Include Packet Data** option (**Rule Properties > General > Events**) if you are interested in examining the source of attacks. Otherwise, leaving the packet data logging enabled creates much larger log sizes.
- Application types under intrusion prevention rules should be checked prior to use.  
For example, Trend Micro OfficeScan and Trend Micro OfficeScan NT Listener application types are inspecting incoming ports 8080, 4343, 26964, 24880, and 46485 by default.
- OfficeScan ports can be changed, especially the random 5-digit client port. These rules should be re-configured to match your OfficeScan settings before assigning them.
- One port cannot be assigned to more than eight application types; otherwise, the rules cannot work on that port.

## G. Interface tagging

By default, firewall and intrusion prevention rules are assigned to all interfaces on the computer. You can use **Interface Types** to assign firewall or intrusion prevention rules to a specific interface on a machine that has multiple interfaces (for example, if there are some specific rules you would like to apply to only the wireless network interface).

To configure, go to **Policy > Interface Types > Network Interface Specificity**.

Think about the difference in protection for different interfaces when creating policies. Consider populating the Interface Type based on the different networks available to all potential Deep Security Agent protected machines.

## H. Ransomware detection

Refer to [Ransomware Detection and Prevention in Deep Security](#), which includes recommendations on rolling out the rule.

## I. TippingPoint Network Security

It is often beneficial to use TippingPoint network security and Deep Security host security. Intrusion prevention (IPS) rules now show the TippingPoint ID of the equivalent TippingPoint rule.

### 5.2.5 Integrity Monitoring

Monitoring the operating system, application files and directories is an excellent way to maintain the integrity of the data on your server. Unexpected changes to these files can be a good indicator that something suspicious has occurred and should be investigated. Rules created for Integrity Monitoring should be as specific as possible to improve performance and avoid conflicts or false positives. Do not try to create a rule that monitors the entire hard drive.

#### A. Using Integrity Monitoring to protect against malware

Integrity Monitoring can monitor files and registries. Malware typically infects a system by modifying certain registry keys and various system files. The default Deep Security rules allow you to monitor the integrity of a machine by observing what is most commonly changed by malware in an infected system. Here are a few sample rules that are applicable for all types of situations in Windows platform:

- Rule 1002773 – Microsoft Windows – ‘Hosts’ file modified
- Rule 1002776 – Microsoft Windows – ‘All Users’ Startup programs modified
- Rule 1002778 – Microsoft Windows – System DLL or EXE file modified

Unless new software or a security patch is installed, there is no reason why any of these files should be modified. If such an event is raised, the administrator can check what is happening on the machine to determine whether or not it is compromised.

It is also possible to create custom rules to monitor specific threats. If you know the behavior of a particular virus you are trying to contain in an environment, you can create a special monitoring rule that checks for certain registry keys or files created by the virus. This can determine if the spread of the virus is being contained.

Note that Integrity Monitoring detects changes made to the system but cannot prevent or undo these changes.

#### B. Baselines

Baselines are automatically created when integrity monitoring rules are assigned to a computer. Retrieving baselines is necessary to recognize any abnormal behavior that might occur. Trend Micro recommends enabling **Scan Computers for Integrity Check** for computers.

#### C. Rules from a Recommendation Scan

Recommended integrity monitoring rules typically result in too many monitored entities and attributes. Decide what is critical and what should be monitored, then create custom rules or tune out of the box rules.

Pay attention to the rules that monitor frequently changed properties, like process IDs or open ports, as they can be very active and might require some adjusting.

## D. Trusted-Source-Based event tagging

When Integrity Monitoring is used, depending on the rules and settings, it might be difficult to search and determine which events are good and informational, and which events need further investigation.

The Deep Security auto-tagging helps to group and label multiple events to suppress security events for legitimate changes.

To configure this, go to **Deep Security Manager > Events and Reports > Integrity Monitoring Events > Auto-Tagging > New Trusted Source**.

Deep Security allows administrators to automatically tag authorized changes by using internal reference servers, Certified Safe Software Service that Trend Micro hosts in the cloud, or by comparing it with other computers in a group. Certified Safe Software Service is a cloud-based database of signatures that Trend Micro has certified as known-good files. More information on how to enable Trusted-Source-Based event tagging can be found in the Online Help and Administrator's Guide of Deep Security.

Selecting the Trusted Source:

- **Local Trusted Computer**

Use this when implementing a Golden Host model, where applications and files installed on the Golden Host are used as a basis for comparison.

This model is most useful when:

- There are in-house applications installed on the local trusted computer.
- Software, service packs or patches are installed on the local trusted computer and can be used as a reference for other computers.
- The local trusted computer is malware-free and secure.
- The local trusted computer contains Integrity Monitoring rules that are similar to the computer that uses it as reference.

Best Practices:

- The security events from the trusted computers must be collected before the security events from other computers. You can use scheduled task to automatically scan trusted computers.
- Create two scheduled integrity monitoring scans. The first scan only checks the trusted computers while the second scan checks the others.
- To only trust events that have been generated as part of a maintenance window, leverage the **Pause Collection** functionality available in the **Auto-Tag Rule** properties. This functionality disables automatic additions of new information to the Known Good Store based on changes on the trusted source, when the collection has been paused. When paused, the events from the associated computers related to previously trusted events continue to be tagged. However, new information is not added to the Known Good Store until collection is resumed.

- **Certified Safe Software Service**

Use this when there are no local reference servers and there is an option to install and upgrade software at any time. In this scenario, files are compared against Trend Micro's database of known-good files.

Best Practices:

- Ensure Deep Security Manager has connection to the internet to query this cloud-based service.

- Certified Safe Software Service only supports SHA-1. If this service is used, **Policy > Integrity Monitoring > Advanced tab > Content Hash Algorithms** should be set to SHA-1.
- Among the three trusted-source-based event tagging mechanisms, Certified Safe Software Service is the safest and most secure because there is no need to maintain a reference server. Trend Micro is responsible for ensuring that the cloud service only contains known-good files.
- Certified Safe Software Service should have top priority over other auto-tag rules.

- **Trusted Common Baseline**

Use this when a group of computers can use each other as reference. The baselines of the computers in this group is added to the common baseline. The computers in this group should be secure and free of malware, as changes in one computer are automatically added to the baseline. When a similar event occurs on another computer in the group, the event is automatically tagged.

Best Practices:

- The trusted common baseline auto-tagging rule should be in place before any integrity monitoring rules are applied to the computers in the common baseline group.
- Group the computers sharing the same operating system and function (for example, Microsoft SQL servers running on Windows 2008 R2).
- Setup and maintenance of trusted common baseline is easier compared to local trusted computer, but the level of protection is lower because all computers in the group are considered trusted. Trusted common baseline should be set to the lowest priority.

## E. Real-Time File Integrity Monitoring

Starting with Deep Security 12.0, the updated file monitoring engine is shared with application control and allows real time detection of file changes for both Linux and Windows. Previously, Linux integrity scans were scheduled only. This enhancement improves Deep Security's ability to meet compliance requirements.

- Beginning with Deep Security 12.0, integrity monitoring supports real-time monitoring of file changes for both Linux and Windows.

**NOTE** Deep Security Agent for both 64-bit Windows and 64-bit Linux now depends on the application control plugin to trigger the real-time file system events that are sent to the integrity monitoring plugin.

- 32-bit Windows platforms run in legacy mode and do not provide the user and process information for real-time change events. As in previous releases, real-time integrity monitoring is not available on 32-bit Linux platforms.
- Only real-time file events include information about the user or process that made the change. As in previous releases, other types of integrity monitoring events such as change to services or running process do not include this information.

## F. Change details

Starting in Deep Security 12.0, the updated file monitoring engine captures who made changes to a monitored file. This attribute is critically important for you to investigate and respond appropriately to change events and can help meet compliance requirements.

## G. Disk spaces on local agent for integrity function

The size of the SQLite database varies depending on the number of events that occur on the host. If free disk space drops to less than 5 MB, Integrity Monitoring is suspended. The `dsp.ImThread` thread vacuums the database when the following conditions are satisfied:

- There is no ongoing Integrity Monitoring scanning.
- The size of unused page in the database is more than 4 MB.

### 5.2.6 Log inspection

Events from the Windows event log and other application specific logs are a great source of information for the status of your server and applications. Log Inspection is an automated solution to inspect these log files for suspicious events and alerts and is a valuable feature to include for your defense in depth strategy.

This is especially useful for creating easier access to important events in monitored log files, without manually tracing through it.

- Log Inspection rules must be properly configured. Most recommended rules work well, but Windows Event rules should be adjusted to gather security events relevant to your requirements. Events for this feature can overwhelm the Deep Security Manager database if too many log entries are triggered and stored.
- Severity Clipping
  - Send Deep Security Agent and Deep Security Virtual Appliance events to syslog when they equal or exceed the following severity level: This should typically be changed when a syslog server is used. This setting determines which event triggered by those rules is sent to the syslog server (if syslog is enabled).
  - Store events at Deep Security Agent and Deep Security Virtual Appliance for later retrieval by Deep Security Manager when they equal or exceed the following severity level: This setting determines which log inspection events are kept in the database and displayed on the log inspection events screen. Custom rules can be made to monitor logs that are not in the included set of rules.

### 5.2.7 Application Control

Application Control was added in Deep Security 10.0. In Deep Security 20, it added more platforms supporting this capability. Refer to [Supported Features by Platform](#).

**NOTE** Application Control continuously monitors your server and logs an event whenever a software change occurs. It is not intended for environments with self-changing software or that normally creates executables, such as some web or mail servers.

When Application Control is enabled for blocking executables, it looks only for software files when examining the initial installation and monitoring for change.

Software can be:

- Windows applications (.exe, .com, .dll, .sys), Linux libraries (.so) and other compiled binaries and libraries
- Java .jar and .class files, and other compiled byte code
- PHP, Python, and shell scripts, and other web apps and scripts that are interpreted or compiled on the fly
- Windows PowerShell scripts, batch files (.bat), and other Windows-specific scripts (.wsf, .vbs, .js)

Application control checks a file's extension to determine if it is a script. Additionally, on Linux, application control treats any file with execute permissions as if it is a script.

On Windows computers, application control tracks changes on the local file system, but not on network locations, CD or DVD drives, or USB devices.

Application control is integrated with the kernel (on Linux computers) and file system, so it has permissions to monitor the whole computer, including software installed by root or administrator accounts. The agent watches for disk write activity on software files, and for attempts to execute software.

If your environment has an extension mentioned above but that is considered a safe file, add it to the allow list in software inventory.

Beginning with Deep Security 11.0, Application Control was enhanced with a new Block by Hash feature that allows administrators to submit known bad hash values to Deep Security for Application Control block list enforcement.

The control recognizes a new Global rule set that includes a list of hash values to be blocked. This rule set takes precedence over any other rules from existing shared or local rule sets and is enforced by every Deep Security Agent enabled with Application Control. This provides a simple way to block unwanted or bad software from running at a global system-wide level. The design allows the workflow to be fully automated; with APIs for creating the Global rule set, adding and deleting hash values.

Application Control creates a software change event log whenever new executable files are detected on protected systems. Sometimes these changes are generated as part of the normal operation of trusted software. For example, when Windows self-initiates a component update, thousands of new executable files may be installed. Application control auto-authorizes many of these file changes when created by well-known Windows processes and no longer create corresponding change log events. Removing the noise associated with expected software changes provides a clearer visibility into changes that may require your attention.

Before you deploy this feature in customer environment, make sure you already checked the support matrix of application control vs features in the [Supported features by platform](#) article in the Deep Security Help Center.

**NOTE** When using Application Control, if you create a golden image, update it with required patches, create a shared ruleset, and then apply that shared ruleset to other computers. When you install those same patches on the other computer, they will be allowed to execute because they are in the shared ruleset. However, the patch updates will appear on the Software Changes page. To avoid this, Application Control must be set to Maintenance Mode when applying patches.

### 5.2.8 Connected Threat Defense (CTD)

Trend Micro developed a concept called Connected Threat Defense (CTD). Deep Security, which has an improved participation at CTD since version 10.0, is now able to push suspicious files to the Deep Discovery Analyzer sandbox.

Once intel is gathered for a file detected as risky, a suspicious object is generated around it, which is then pushed to the Control Manager (TMCM) or Apex Central. Afterwards, Apex Central pushes the most up-to-date list of suspicious objects to Deep Security Manager. All the agents configured to receive the Suspicious Objects List from Deep Security Manager receive the information and be able to stop the threat, even the malicious file is able to run on the system.

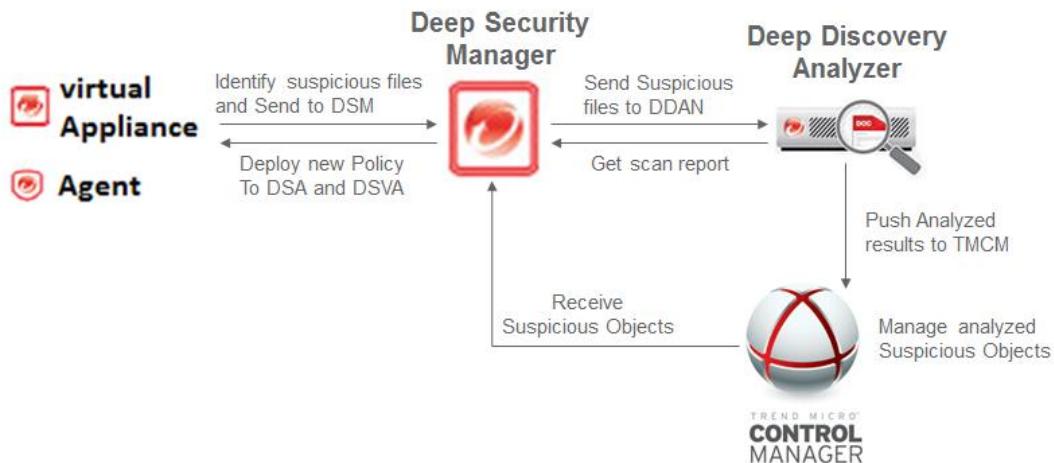


Figure 22: Connected Threat Defense Process

#### Best Practices:

- Ensure you have a working Deep Discovery Analyzer in your environment. Check the Deep Discovery Analyzer Admin Guide for more information.
- Go to **Administration > System Settings > Connected Threat Defense** and make sure **Enable submission of suspicious files to Deep Discovery Analyzer** is selected.

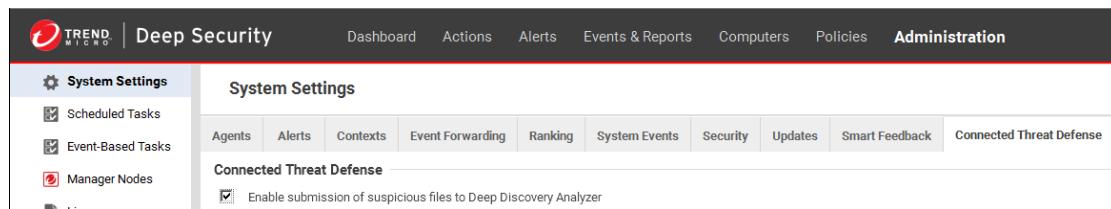


Figure 23: Enable submission of suspicious files to DDAN

- Ensure that **Automatic file submission** is also selected, because it assures that all suspicious files are submitted to the Analyzer every 15 minutes.

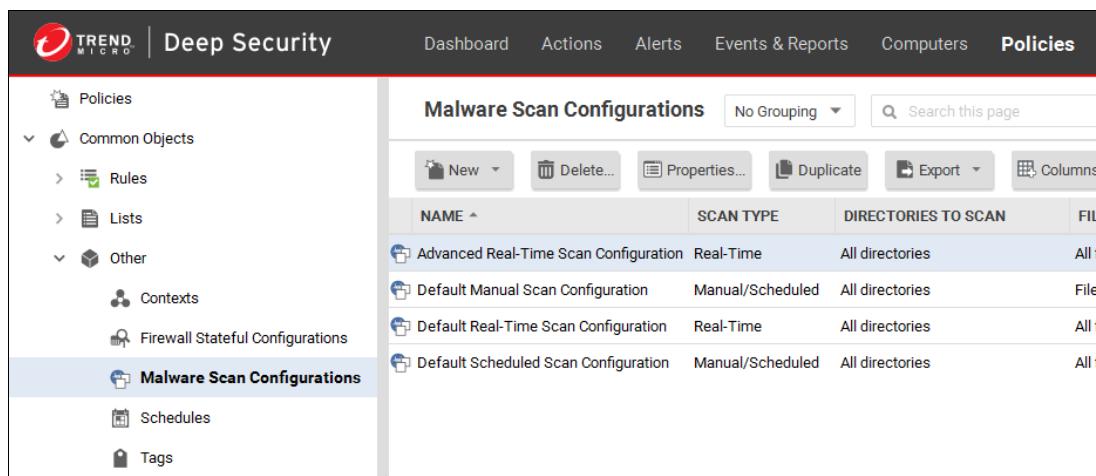


Figure 24: Automatic file submission

Go to **Administration > System Settings > Connected Threat Defense** and make sure **Compare objects against Suspicious Object List** is selected.

Note that the suspicious object list update or deployment can be performed by manually updating the suspicious file list in Deep Security Manager. Go to **Administration > Updates > Security** and use the controls in the **Suspicious Object List Updates** column to get the latest list and send it to your protected computers. You can also create a scheduled task that regularly checks for an updated list.

In **Malware Scan Configuration > General > Document Exploit**, ensure **Scan documents for exploits** is selected and **Scan for exploits against known critical vulnerabilities and aggressive detection of unknown suspicious exploits** is selected.

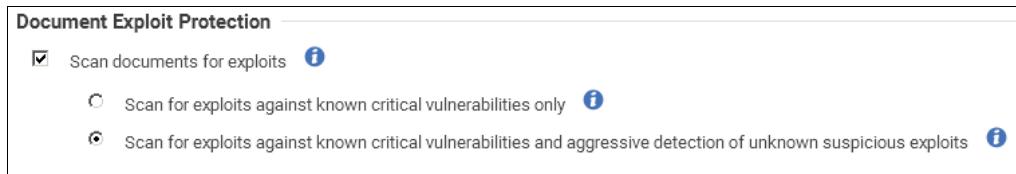


Figure 25: Scan documents for exploits

**NOTE** If there is a need to change the Remediation Actions to Use Custom Actions, ensure that Aggressive Detection Rule is configured to Pass, as it guarantees a file that triggers this rule will be submitted for analysis.

Check the Control Manager guide for more information on how to configure the desired behavior expected from Deep Security Agents whenever it finds a suspicious object.

## 5.3 Administration and System settings

### 5.3.1 Recommendation scan

The recommendation engine is a framework that exists within Deep Security Manager, which allows the system to suggest and automatically assign security configurations. The goal is to make the configuration of computers easier and only assign security that is required to protect that computer.

Recommendation scans affect the performance impact of Deep Security Manager, so schedule these when no other tasks are running.

#### A. Run recommendation scans weekly

Recommendation scans can impact Deep Security Manager's performance, so avoid scanning with high frequency. Systems that don't change often (servers) can be scanned less frequently. Systems that lack control over when changes occur (workstations) should be scanned more frequently.

This is accessed via **Policy or Computer > Settings > General > Recommendations > Perform ongoing scans for recommendations**.

Ongoing scans for recommendations are not advised, this setting should be set to **no**. If ongoing scans are set to automatically start, administrators have no control over when they occur. It can lead to high CPU usage of the Deep Security Manager process at random times throughout the day.

The best practice is to create a new scheduled task with type Scan Computers for Recommendations to take place once a week instead.

#### B. Run scans after a major change (application of a patch, installation of new application, and so on)

Scans should be performed after major changes to the computer to determine if any additional protection is required.

#### C. Run scans after applying a new Deep Security update

This allows you to use the recently released rules, and get the latest updates assigned or unassigned.

#### D. Assign recommended rules to the policy, not to the computer

As a best practice, recommended rules should be assigned to the policy and not directly to computers.

Recommended rules can only be applied automatically to the machine where the recommendation scan was run. Refer to the [Policy](#) section for additional details.

#### E. Run the scan on computers with similar functions

In environments with similar computers, scans can be performed on a subset of computers to gather baseline recommendations for them all.

#### F. Automatic assignment of Intrusion Prevention recommendations

This option is disabled by default via **Policy** or **Computer > Intrusion Prevention > General > Recommendations**. It is recommended to enable this option on the computer level. An exception to this would be when the machine is on its own and cannot be associated with other machines in a group. When this is enabled, intrusion prevention rules are automatically enabled on the machine when the rule is found to be applicable, or a matching application is found on the machine related to the rule.

See [Policy vs Computer Level](#) for details.

Disabling this setting gives administrators better control on assigning and unassigning recommended rules.

### 5.3.2 System settings

#### A. Communication direction

This option can be set at the policy or computer level. The default **Bidirectional** method is recommended and used in most production deployments.

**Manager-Initiated** should typically only be used for machines in the DMZ that cannot reach Deep Security Manager in the datacenter.

**Agent-Initiated** method is recommended for environments where the agent is behind a firewall, such as mobile workstations. A disadvantage of the Agent-Initiated method is that policies cannot be updated on demand. The system must wait for the next heartbeat before the policy change can be deployed.

To configure this setting, go to **Policy** or **Computer > Settings > Computer > Communication Direction**.

#### B. Heartbeat

This can be configured at the policy or computer level, accessible via **Policy** or **Computer > Settings > Computer > Heartbeat**.

Heartbeat Interval

- Servers – 10 Minutes
- Desktops – 60 Minutes

The most important factor in choosing the interval setting is the acceptable amount of time between when an event triggers, and when the events are delivered to Deep Security Manager. Choosing a high frequency can have a negative impact on the Deep Security Manager's performance.

Why do servers require a lower heartbeat (more frequent interval)?

They are typically more critical assets, and administrators might want to be notified of relevant events more frequently.

If protection is in place when roaming, why would administrators want a laptop to connect to Deep Security Manager while off network?

To have the ability to update the policy on the laptop when roaming. Also, events are stored in Deep Security Manager with the event timestamp, not the timestamp when they were delivered to Deep Security Manager. Historical events can often be overlooked for devices that haven't performed a heartbeat in the last 24 hours.

Number of heartbeats that can be missed before an alert is raised

By default, the value is 2. If a heartbeat is missed after two attempts, the agent is tagged as offline. It is recommended to increase this value in most environments, so agents that are actually online are not tagged as frequently.

In addition, if a heartbeat fails, events are stored locally to Deep Security Agents or Deep Security Virtual Appliances until the connection is restored.

If SIEM or Syslog servers are used to store events, heartbeat setting are less of a concern. Agents send events to Syslog in real-time, without batching and waiting for the next heartbeat.

### C. Agent-initiated activations

This option is most common for environments with large distributed installations, where it is more desirable for the activation to be initiated by the agent, rather than Deep Security Manager.

- Very useful when many computers are added to a Deep Security installation and script can be used to automate the activation process. See [Deployment Scripts](#).
- For the Agent-Initiated activation to succeed, **Allow Agent-Initiated Activation** must be enabled by navigating to the **Administration > System Settings > Agents** tab.
- Used when the server cannot communicate or discover clients directly, but clients can reach server without a problem.
- Deep Security Agents can initiate the activation process using a locally run command-line tool.
- To activate, use Run as administrator to open cmd.exe, and run the command:

```
dsa_control /a dsm://dsmhost:4120/
```

During the activation, the agent can determine the assigned policy and apply it. Additionally, agents can request scans or updates after they have been activated. This can be used to tightly integrate scans to other changes, such as patch management. Refer to the product Online Help or Administrator's Guide for additional details.

- Allow reactivation of cloned VMs.

This is used in environments with VM clones. For instance, cloning new VM/instance from pre-activated VM, templates, or AWS images. It can also be used to switch an orphan managed VM/instance back to the vCenter or cloud managed VM/instance).

If enabled, Deep Security Manager recognizes the VM as a clone and reactivates it as a new computer.

Consider the following:

- VM/Instance must be managed under Cloud Account/vCenter Connector.
- VM/Instance must have unique system IDs (BIOS UUID, MAC addresses, hostname, IP).
- Ensure the network communication in the environment has no communication issues. This helps prevent the host from going offline or getting a mismatch.
- Cloned VM – Original VM must remain activated.
- Clone activation does not migrate any policies or settings from the original VM.

- Allow reactivation of Unknown VMs

This allows previously activated VMs, which have been removed from their cloud environment and deleted from Deep Security Manager, to be reactivated if they are added back to the inventory of VMs.

This is useful if the server deleted the agent by accident or if the server deactivated the agent, but the agent did not receive the deactivation request.

Consider the following:

- The VM must have a valid server certificate but no activation record on current Deep Security Manager servers.
- Unknown activation does not migrate any policies or settings from the original VM.

#### D. Send Policy Changes Immediately

By default, this setting is enabled. If there are changes made to any setting within the Deep Security environment, all affected computers are immediately updated.

Change the setting by going to **Policy or Computer > Settings > General > Send Policy Changes Immediately**.

It is recommended that this option is disabled. Instead, use a scheduled task to update and send policy changes to agents manually. Manual or scheduled updates give the administrator more control to follow the existing change control process. Scheduled tasks can be set to update machines during maintenance windows, off hours or other times with low traffic.

To monitor when machines were last updated, administrators can use the **Last Successful Update** information on the **Computers** tab of Deep Security Manager.

#### E. Agent Self-Protection

By default, if anti-malware functionality is installed, Deep Security Agent can protect its services, installation directories and status from any modification, including shutdown from the self-protection setting.

If this setting is enabled, enable and set a password for the local override setting by going to **Policy or Computer > Settings > General > Agent Self Protection**.

It is strongly recommended to enable this functionality to prevent malicious applications from removing or disabling Deep Security Agent protection on the computer.

#### F. Scheduled Tasks

You can automate certain common tasks using a schedule. You should schedule these tasks:

- Download Security Updates (Frequency: Once Daily)
- Scan Computers for Malware (Frequency: Once Weekly, or in accordance with the company policy)
- Scan Computers for Recommendations (Frequency: Once Weekly)
- Send Policy (Frequency: Once Weekly, and run as needed)

When scheduling recommendation scans, the best practice is to set the task by group (per policy, or for a group of computers, no more than 1,000 machines per group) and spread it to different days (database server scans are scheduled every Monday, mail server scans are scheduled every Tuesday, and so on).

Recommendation scans can be CPU-intensive on Deep Security Manager, so setting different schedules per group helps avoid performance issues. Schedule recommendation scans more frequently for systems that change often.

#### G. Log retention

The best practice is to run the data pruning feature built into Deep Security Manager. If there is a compliance requirement to keep log sets for a longer period of time, the recommendation is to use third-party SIEM products to store the data. Configure this via **Administration > System Settings > Storage**.

Event retention is relevant to maintain a reasonably sized database. Default retention time settings are:

- Seven days for security events (AM, FW, IPS, IM, LI)
- Never for system or agent events (as these can be useful for audit history purposes)
- 13 weeks for counters (used for reporting and very small in comparison to the security event logs)

#### H. Using tags for events

Tagging events allows administrators to manually tag events with predefined or custom labels. This makes log monitoring and review more efficient.

To configure tags and auto-tag rules, go to **Policies > Common Objects > Other > Tags**.

See also [Trusted-Source-Based Event Tagging](#).

#### I. Active Directory synchronization for users and computers

Deep Security supports the discovery of computers using Active Directory and importing users for user management. Non-SSL based LDAP is not supported to synchronize user account information because it is considered sensitive and should not be sent unencrypted. Domain controllers need to support LDAPs (port 636) for directory synchronization to work.

Refer to the following information from Microsoft for details on enabling LDAPs:

- [How to enable LDAP over SSL with a third-party certification authority](#)
- [LDAP over SSL \(LDAPS\) Certificate](#)

However, discovery and synchronization of computers with active directory can be done using standard LDAP (port 389) as the information retrieved is not sensitive (user credential information is not pulled down).

## 6 Performance tuning and optimization

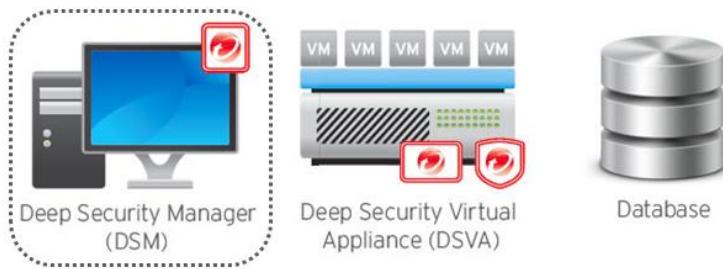


Figure 26: Performance Tuning for DSM

### 6.1 Deep Security Manager

#### 6.1.1 Configure Deep Security Manager's maximum memory usage

The Deep Security Manager default setting for maximum memory usage is 4 GB. Refer to [Sizing](#) in the Deep Security Help Center to determine the recommended size allocated for Deep Security Manager.

To configure the amount of memory available to Deep Security Manager:

For Windows:

1. Go to the Deep Security Manager directory, which is the same directory as Deep Security Manager.exe (for example, C:\Program Files\Trend Micro\Deep Security Manager).
2. Create a new file called Deep Security Manager.vmoptions.
3. Edit the file by adding the line: -Xmx8g (in this example, 8g would make 8 GB of memory available to Deep Security Manager).
4. Save the file and restart Deep Security Manager.

For Linux:

1. Go to the Deep Security Manager directory (/opt/dsm).
2. Create a new file called dsm\_s.vmoptions
3. Edit the file by adding the line: -Xmx8g (in this example, 8g would make 8 GB of memory available to Deep Security Manager).
4. Save the file and restart Deep Security Manager.

You can verify the new setting by going to **System > System Information** and in the **System Details** area, expand **Manager Node > Memory**. The **Maximum Memory** value should now indicate the new configuration setting.

When you consider adding CPU or memory to Deep Security Manager, also consider adding a new Deep Security Manager node. Two Deep Security Manager nodes with 4CPU/8G memory has better performance than one Manager node with 8CPU/16GB memory, in most cases. See [Configure Multi-Node Managers](#).

### 6.1.2 Configure multiple managers

Run and install multiple managers operating in parallel using a single database. Running multiple nodes provides increased reliability, high availability, virtually unlimited scalability, and better performance.

Each node is capable of all tasks, and it is possible to log in to any node to carry out tasks. The failure of a node does not impact tasks or lose data.

You can add or reduce other manager nodes anytime, with no downtime.

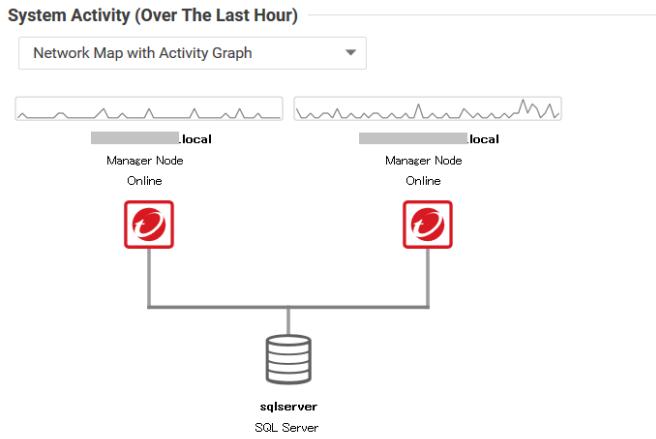


Figure 27: Configuring Manager Node

Each node must run the same version of the Deep Security Manager software. If you upgrade one of the manager-nodes to a later version, other nodes shut down automatically until they are upgraded to the same version.

To add a new manager node:

1. Prepare new hardware and operating system.
2. Run the Deep Security Manager installer on that hardware.
3. Select the same database for Deep Security Manager as the existing manager.
4. Select **Add a new Manager node**.

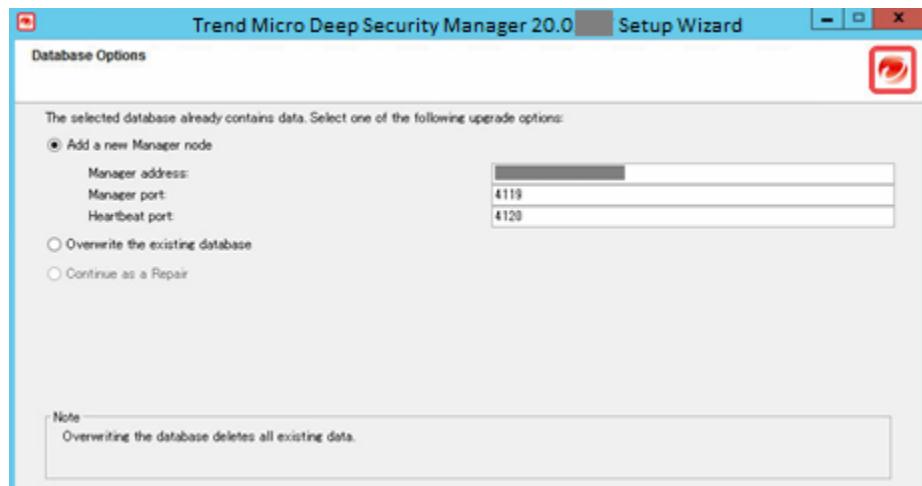


Figure 28: Add a new Manager node

Two manager nodes are recommended. Three or more manager nodes can cause a database I/O bottleneck and result in decreased performance. Instead of adding more than two manager nodes, increase the system RAM, JVM allocation, and CPU to achieve scalability (see [Sizing](#) in the Deep Security Help Center for guidelines). If, after following the sizing guidelines, you feel the manager nodes are insufficient to implementation, contact support for guidance.

In a multi-node manager environment, all agents and virtual appliances have the addresses of all manager nodes. The agents and virtual appliances use the list of addresses to randomly select a node to contact. They continue to try the rest of the list until no nodes can be reached (or are all busy).

If you use multi-node manager with a load balancer environment, configure the load balancer setting through **Administration > System Settings > Advanced > Load Balancers**.

#### 6.1.3 Performance considerations for Deep Security Virtual Appliance

The default configuration of Deep Security Virtual Appliance uses 4 GB of RAM, but you can increase it if the appliance needs more memory in your environment. For instructions on how to change the RAM for the appliance, see [Deep Security Virtual Appliance memory allocation](#) in the Deep Security Help Center.

#### 6.1.4 Performance profiles

Performance profiles determine the number of concurrent operations that can take place for specific types of functionality. This includes the amount of Deep Security Agent or Deep Security Virtual Appliance-initiated connections that the manager accepts, and settings to avoid scan storms in virtualized environments.

This setting allows you to adjust the limits for a given Deep Security Manager and set the load you want. It allows to control scans done in an environment so an unlimited number of scans can be run. It also allows to choose to limit the number of scans to prevent performance issues.

You can change the performance profile through **Deep Security Manager > Administration > System Information**. Click the desired manager on the map and change the performance profile.

Refer to the following tables for a general idea on what each type of profile can handle.

#### A. Aggressive profile

The aggressive performance profile is optimized for a dedicated Deep Security Manager. This means the computer hosting Deep Security Manager does not perform any other task (such as database server or web server).

Operation	2-core system	4-core system	8-core system
Activations	10	15	20
Updates	25	37	50
Recommendation Scans	10	15	20
Check Status	100	100	100
Agent/Appliance-Initiated Heartbeats	20 Active	30 Active	50 Active
	40 Queued	40 Queued	40 Queued
Simultaneous Endpoint Disk & Network Jobs	50	50	50
Simultaneous Endpoint Disk & Network Jobs per ESX	3	3	3

Table 5: Aggressive Profile

Use this profile on the following scenarios:

- Virtualized environments (Agentless deployment with Deep Security Virtual Appliance and VMware)
- Hyper-V, Citrix, or other hypervisors where Physical Agents are used to provide protection

The default profile limits concurrent scans to three per ESX host and 50 globally for physical machines or VMs on other virtualization platforms, to prevent scan storms.

Concurrent limit includes anti-malware scans, recommendation scans, integrity scans, baseline rebuild, and updates.

Sample Scenario:

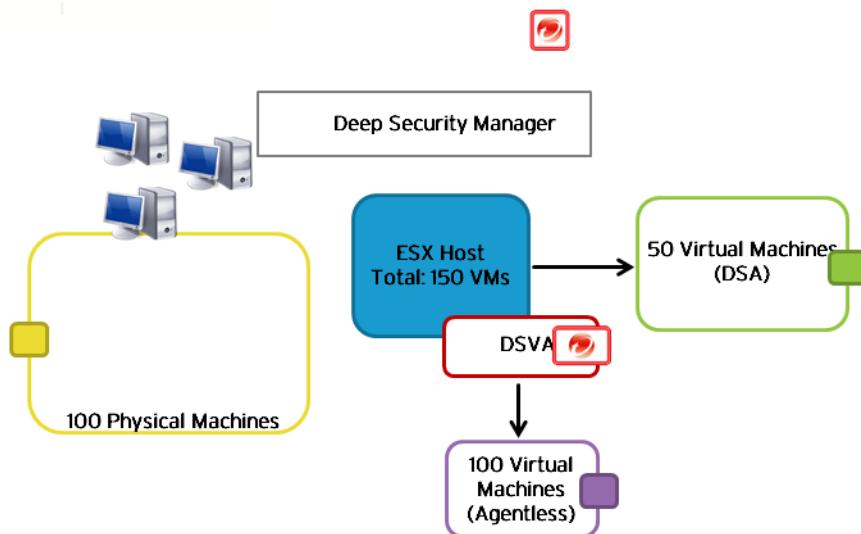


Figure 29: Aggressive Profile Sample

When a scan is triggered for all 250 machines, Deep Security processes the request as follows, instead of running the scan for all 250 machines at the same time:

- Scan the first three VMs protected by Deep Security Agent. The remaining 47 VMs are placed in the queue. They are seen in the console as Scan Pending. As soon as one scan job finishes, the next scan in the queue starts.
- Scan the first 50 physical machines protected by Deep Security Agent. The remaining 50 machines are placed in the queue. As soon as one scan job finishes, the next scan in the queue starts.
- Scan one VM protected by Deep Security Virtual Appliance. The remaining 99 VMs are placed in the queue. They are seen in the console as Scan Pending and processed as soon as the one agentless VM finishes its scan.

Maximum concurrent scans for Deep Security Virtual Appliance are set to 1 by default. However, this can be changed under the Deep Security Virtual Appliance properties. Go to **Settings > Scanning > Virtual Appliance > Max Concurrent Scans**.



Figure 30: Max Concurrent Scans

This setting determines the number of scans that the virtual appliance performs at the same time. The recommended maximum number is 5. If you increase the number beyond 10, scan performance might begin to degrade. Scan requests are queued by Deep Security Virtual Appliance and carried out in the order in which they arrive.

## B. Standard profile

Similar overall settings with aggressive profile, but set to a lower limit.

Operation	2-core system	4-core system	8-core system
-----------	---------------	---------------	---------------

Activations	5	10	10
Updates	16	26	46
Recommendation Scans	3	5	9
Check Status	65	100	100
Agent/Appliance-Initiated Heartbeats	20 Active	30 Active	50 Active
	40 Queued	40 Queued	40 Queued
Simultaneous Endpoint Disk & Network Jobs	50	50	50
Simultaneous Endpoint Disk & Network Jobs per ESX	3	3	3

Table 6: Standard Profile

Use this profile on the following scenario:

- Only when Deep Security Manager is installed on a system with other resource-intensive software and resources are limited.

### C. Unlimited agent disk and network usage

This setting is identical to Aggressive but has no limit on endpoint disk and network usage operations.

Operation	2-core system	4-core system	8-core system
Activations	10	15	20
Updates	25	37	50
Recommendation Scans	10	15	20
Check Status	100	100	100
Agent/Appliance-Initiated Heartbeats	20 Active	30 Active	50 Active
	40 Queued	40 Queued	40 Queued
Simultaneous Endpoint Disk & Network Jobs	Unlimited	Unlimited	Unlimited
Simultaneous Endpoint Disk & Network Jobs per ESX	Unlimited	Unlimited	Unlimited

Table 7: Unlimited Agent Disk & Network Usage

Use this profile on the following scenario:

- Fully physical environments

Using this profile concurrently runs as many scans as possible and assumes there is no shared disk.

1. Limited Disk and Network Usage - This profile exists only on earlier versions of Deep Security. If you upgraded your Deep Security environment, you might see this as an additional profile.

- Custom Performance Profile - If further tuning of the default profiles is desired, contact Trend Micro Technical Support for assistance.

Some of the symptoms that help determine if a custom performance profile is needed are:

- Frequent agent heartbeat rejections
- Recommendation scans that take too long to complete
- Anti-malware scans that take too long to complete



Figure 31: Performance Tuning of Database

#### D. Higher Capacity

By default, new installations use the Higher Capacity profile, which is optimized for a dedicated Deep Security Manager. This performance profile is similar to Aggressive or Unlimited Agent Disk & Network Usage, however, it has higher capacity for job loading.

Operation	2-core system	4-core system	8-core system
Activations	15	25	45
Updates	39	64	114
Recommendation Scans	15	25	45
Check Status	259	259	259
Agent/Appliance-Initiated Heartbeats	20 Active	30 Active	50 Active
	40 Queued	40 Queued	40 Queued
Simultaneous Endpoint Disk & Network Jobs	50	50	50
Simultaneous Endpoint Disk & Network Jobs per ESX	3	3	3

Table 8: Higher Capacity Profile

Use this profile on the following scenario:

- You have sufficient CPU and memory resources.

## 6.2 Database

### 6.2.1 Exclude database files from anti-malware scans

To optimize and establish a stable database performance, database related files (dsm.mdf and dsm.ldf) should be excluded from any type of anti-malware scanning.

### 6.2.2 Auto-growth and database maintenance

For Microsoft SQL Servers, create less auto-growth events in the future by adjusting the default auto-growth settings to a greater value.

**NOTE** Each time an auto-growth event is performed, SQL Server delays database processing. This means that processing against that database will be delayed until the auto-growth event is completed. This could result in slower response time for other SQL commands that are being processed against the database that is growing.

Monitor and perform database maintenance jobs to make sure things are working normally and to prevent creating a large, fragmented database, which could lead to performance issues.

### 6.2.3 Database indexing

It is recommended to periodically rebuild the index of the database to improve performance.

Indexes are specialized data structures that operate on tables (and sometimes views) in the database engine, used to aid in the searching for and sorting of data. Indexes are vital for the database engine to return results quickly.

As data is modified in the underlying tables that the indexes operate on, the indexes become fragmented. As the indexes become more and more fragmented, query times get longer. To fix this situation, either reorganize or rebuild the index in Microsoft SQL or Oracle.

For additional information, see the following:

- [Reorganize and rebuild indexes](#)
- [Index Rebuilding Techniques](#)

## 6.3 Deep Security Relay

### 6.3.1 Deep Security Relay location

At least one Deep Security Relay is required in every Deep Security environment. You can deploy Deep Security Relay in the same node as Deep Security Manager when you place the Deep Security Agent package in the same folder as the Deep Security Manager installer.

It is recommended to set up additional relays for redundancy. You can enable the relay feature on Deep Security Agent at any time, but once it is enabled, it populates the relay repository with files it downloads from the manager

and updates it downloads from the internet. You can disable relay in Deep Security 20, but you need to delete the repository folder manually.

### 6.3.2 Relay groups

Each relay belongs to a relay group. Deep Security Agents and Deep Security Appliances are assigned to relay groups, not individual relays. By default, Deep Security Manager has only the Default Relay Group and all relays belong to this group. You can create multiple relay groups that can be arranged in a hierarchy, so a single top-level group gets its updates from the Trend Micro Update Server and then passes them down through a hierarchy of subgroups.

To add a new relay group, go to **Administration > Updates > Relay Groups**.

Relay Groups			
	New...	Delete...	Properties...
NAME	UPDATE SOURCE	PROXY	DESCRIPTION
Satellite office A	Parent-Relay	OfficeA-Proxy	Relay group for Satelite office A
Parent-Relay	Primary Security Update Source	Default	Relay group for Head office
Default Relay Group	Primary Security Update Source	Default	New Relays get assigned to this Group

Figure 32: Relay Groups

## 6.4 NSX-V

### 6.4.1 NSX firewall

The NSX firewall rules can be created to filter out unwanted traffic before they are redirected to Deep Security Virtual Appliance for firewall and IPS inspection. Deep Security Virtual Appliance provides the firewalling capability in a different layer within NSX infrastructure, based on the following general design considerations:

- VMWare NSX Distributed Firewall (DFW) is meant to enforce firewall directly at VM vNIC layer, which is used to filter east-west traffic flow in SDDC environment.
- In most cases, VMWare NSX Edge Firewall is responsible for handling north-south traffic, which is moving through the data center.
- Deep Security is deployed on a cluster level in NSX as a service, and Deep Security Virtual Appliance is deployed on per ESXi host level. Deep Security Virtual Appliance firewall and IPS engine network traffic filtering are defined in NSX Security Policy Network Introspection Services layer, which is filtered after NSX firewall rule layer.
- Default Deep Security policy contains firewall and IPS rules set, which are mostly based on application and server OS type.

Deep Security Event-Based Task (EBT) is recommended for auto policy assignment and managing the VM's activation status. Deep Security EBT is inserted to NSX Security Policy as a service profile for NSX to redirect the Network Introspection Service. Proper NSX Security Policy and NSX Security Group design are critical for Deep Security policy so that VM receives consistent security configurations.

#### 6.4.2 NSX security policy

In general, VMWare recommends various object grouping models to create NSX Security Policy:

- Network Based Policies: This is the traditional approach of grouping based on L2 or L3 elements. Grouping can be based on MAC addresses, IP addresses or a combination of both.

This is not a recommended approach in dynamic environments, such as Cloud automated deployments, where VMs and application topologies are changed rapidly.

- Infrastructure Based Policies: The grouping is based on SDDC infrastructure like vCenter clusters, logical switches, and distributed port groups. VMWare recommends NOT to take this approach if your environment does not have a physical or logical boundary.
- Application Based Policies: In this approach, grouping is based on the application type.

VMWare recommends using infrastructure-based policies or application-based policies when deploying NSX. Therefore, it is recommended to proactively correlate Deep Security policy management with NSX security group and policy design.

The NSX Security Groups can be defined with multiple inclusion and exclusions as shown in the diagram below:



Figure 33: NSX Security Groups

In NSX, it is possible to assign VMs to multiple security groups. However, from a Deep Security policy assignment perspective, it is important that individual VMs should only be assigned to one NSX security group. Otherwise, it can cause multiple Deep Security policies to be assigned to the VM.

If NSX Security Group Change EBT is leveraged to manage the Deep Security security policy assignment, it is recommended to create the task with the following configurations in individual scenarios:

- Use full NSX security group matching, if possible. To reduce the management efforts, use java regex matching pattern only if necessary.
- Only activate the unprotected VMs with “Appliance protection Available” = TRUE and “Appliance Protection Activated” = False.
- Deactivate VMs when the VMs leave the NSX security group.
- Create EBT for individual NSX security groups and assign the Deep Security security accordingly.
- When multiple vCenters are imported to Deep Security Manager, specify the vCenter in EBT matching condition to allow EBT to only work in expected vCenter.

To achieve better performance, define different security policies for different groups of computers, which have different Deep Security functionalities enabled. For example, define a security policy for computers which only have AM enabled. In this policy, do not specify any Network Introspection Services.

For the computers using Deep Security firewall, add one service in Network Introspection Services to redirect all traffic to Deep Security Virtual Appliance. If only IPS is used, consider only redirecting the ports which need Deep Security Virtual Appliance to be checked when adding Network Introspection Services. For example, if it is a web server, only rules for the port 80 is assigned. Then, only redirect port 80 traffic in the NSX security policy, so that the other traffic can reach VM directly.

**NOTE** Deep Security 20 supports NSX-V 6.4.n or later and NSX-T 3.n or later.

## 7 Disaster and recovery

Deep Security uses a database for all configurations and settings. It is highly recommended to have a proper disaster recovery plan in place. This provides the best chance of successfully recovering a production environment in the quickest amount of time, in case there is a disaster situation.



Figure 34: Backup, Recover, and Restore

It is important that a regular backup of the Deep Security database is scheduled, especially when applying a patch or an upgrade to the software.

- It is recommended to use Microsoft SQL Server Management Studio to back up and restore the database. For a detailed procedure, see [Restore a Database Backup Using SSMS](#) in the Microsoft documentation.
- To back up and restore an Oracle database, consult Oracle support or refer to [Backing Up and Recovering a Database](#) in the Oracle documentation to do the task using the Oracle Recovery Manager Tool.

Do not store your backups in the same physical location as the database files. If your physical drive goes bad, you should be able to use the other drive or a remote location that stored the backups to perform a restoration.

Only restore the database from the same version number as Deep Security Manager.

### 7.1 High Availability

Database clustering is supported in both Oracle and Microsoft SQL environments, and is recommended for disaster recovery situations.

Oracle Data Guard, Microsoft SQL database mirroring, and Microsoft SQL log shipping all have no side effects in regular Deep Security functionality and can be safely used.

**NOTE** In a Microsoft SQL high availability environment, Deep Security Manager should connect to the database's listener IP during installation so that whenever the database is recovered from one to another, you do not need to make any configuration changes in Deep Security Manager.

To recover from a disaster, make sure the database is fully mirrored or restored and available in the environment. Have a cold standby Deep Security Manager ready, point it at the mirrored or restored database, and start the service.

### 7.2 Removing a virtual machine from Deep Security protection in a disaster

If only a selected number of machines need to be isolated and removed:

1. Deactivate the affected virtual machines.

- a. Go to **Deep Security Manager > Computers**.
- b. Right-click the machine and select **Actions**.
- c. Click **Deactivate**.

2. If there is no immediate access to the Deep Security Manager console, use one of the following:
  - If there is another ESXi host that does not have Deep Security protection, vMotion the VM to this host.
  - If all ESXi hosts are protected, login to the local Deep Security Virtual Appliance VM and reset the appliance. Note that doing this removes protection from all VMs protected by that Deep Security Virtual Appliance.

If several VMs have the issue and need to be isolated and removed:

1. Deactivate the affected virtual machines.
2. Deactivate Deep Security Virtual Appliance.
  - a. Go to **Deep Security Manager > Computers**.
  - b. Right-click Deep Security Virtual Appliance and select **Actions**.
  - c. Click **Deactivate**.

**NOTE** In an agentless environment, firewall and Stateful checks are done in the filter driver residing on the ESX host itself. As such, in a disaster scenario, shutting down the Deep Security Virtual Appliance will only impair or shut down anti-malware, integrity monitoring, and recommendation xcan functionalities. If the issue relates to a firewall rule blocking traffic on virtual machines, put the ESXi host in maintenance mode and unprepare it.

## 7.3 Recovering a physical machine (with Deep Security Agent) in a disaster

Sometimes, assigning an incorrect policy or rule can completely isolate a machine from the network. To remove a faulty rule or policy, do one of the following:

1. If rules have been applied to the policy only, remove the faulty rule from the policy and trigger a Send Policy to the affected machines.
  - a. Go to **Policy** and double-click the affected policy.
  - b. Click **Firewall / IP > Assign/Unassign the rule** and press **Save**.
  - c. On the affected machines, right-click **Send Policy**.
2. If rules have been applied directly on the machines, open the details for each affected machine and remove the faulty rule.
  - a. Go to the affected machine and double-click for details.
  - b. Select **Firewall / IP > Assign/Unassign the rule** and press **Save**.
  - c. Go to **Overview > Actions > Send Policy** or right-click on the affected machine under **Computers > Actions > Send Policy**.

3. If you do not know which rule is at fault, remove the entire policy from the machine.
  - a. Right-click the affected machine, then go to **Actions > Assign Policy > None**.
  - b. Right-click the affected machine, then go to **Actions > Send Policy**.
4. If the rule involved is a firewall or intrusion prevention rule, you can also consider turning the firewall and intrusion prevention state to Off. You can do this locally on the affected machine or on the Policy under the **General** tab.
5. If Deep Security Manager cannot communicate with the agents, log on locally to the machine and trigger an agent reset to completely clear all configurations on the agent and deactivate it.

On the command prompt of the local agent, run the following command:

```
dsa_control /r
```

The Reset action does the following:

- Cleans up all Deep Security Agent configuration settings and Deep Security Agent memory.
- Removes relation between Deep Security Agent and Deep Security Manager.
- Removes corresponding entries from the database.

Refer to [Agent Self Protection](#) for details.

6. Reactivate using a new policy without the recent change.

## 7.4 Recovering an inaccessible Deep Security Virtual Appliance

Take the following steps to recover an inaccessible Deep Security Virtual Appliance:

1. Reboot Deep Security Virtual Appliance.
2. If a reboot does not fix it, shut down the existing Deep Security Virtual Appliance.
3. Login to Deep Security Manager and attempt to deactivate the inactive Deep Security Virtual Appliance and wait until you get the error “Deactivation Failed” (**Computers > Deep Security Virtual Appliance > Right Click > Actions > Deactivate**).
4. Clear warnings and errors for that Deep Security Virtual Appliance (**Computers > right-click Deep Security Virtual Appliance > Actions > Clear Warnings and Errors**).
5. Deploy a new Deep Security Virtual Appliance from Deep Security Manager (**Computers > right-click ESX Host > Actions > Deploy Appliance**).
6. Activate the new Deep Security Virtual Appliance (**Computers > right-click Deep Security Virtual Appliance > Actions > Activate**).
7. Reactivate all the VMs to the new Deep Security Virtual Appliance.

Note that when you replace a faulty Deep Security Virtual Appliance, all logs, settings, and quarantined files from the original Deep Security Virtual Appliance are lost.

## 7.5 Isolating a Deep Security issue

1. It is recommended to first isolate the module causing the issue, as opposed to deactivating or uninstalling the agent. Check the related event logs for information and clues regarding the issue.

If no related logs are observed and multiple features are used, disable the suspected module one by one to find the culprit.

For example, if the issue involves HTTP blocked traffic, first disable WRS and then the firewall.

2. For issues involving WRS:

- If traffic to a certain site is blocked, consider adding it to the Allowed URLs by going to the **Policy** or **Computer > Web Reputation > Exceptions** tab. Enter the URL in the allow list, save, and send the policy.
- If adding the site to the allow list does not help, disable the web reputation (**Policy** or **Computer > Web Reputation > General > Web Reputation State**).
- If WRS is disabled and the issue persists, check other enabled features.

3. For issues involving the firewall:

- Note if a new rule or a modification on a rule has taken place. Unassign the suspected rule and verify if the issue persists.
- If you are not sure which rule is causing the issue, consider removing the policy assigned to the affected machine. Verify if the issue persists.
- If no recent change has occurred but traffic is blocked, turn the firewall off. To do this, go to **Policy** or **Computer > Firewall > General > Firewall State**.
- If the firewall is disabled and the issue persists, verify that Firewall Stateful Configurations are also set to None (**Policy** or **Computer > Firewall > General > Firewall Stateful Configurations**).
- If both settings are disabled and the issue persists, switch the Network Engine to "Tap" mode. Go to **Policy** or **Computer > Settings > Network Engine > Network Driver Mode**.

If the issue persists, check the other features that are enabled.

4. For issues involving intrusion prevention:

- Note if a new rule update has been applied or a modification on a rule has taken place. Unassign the suspected rule or roll back the security update. Verify if the issue persists.
- If you are not aware which rule is causing the issue, consider removing the policy assigned to the affected machine. Verify if the issue persists.
- If no recent change or update has been applied but traffic is blocked, switch the behavior from Prevent to Detect or disable the intrusion prevention. Both settings can be found under **Policy** or **Computer > Intrusion Prevention > General > Intrusion Prevention State/Behavior**.
- If intrusion prevention is disabled and the issue persists, switch the Network Engine to Tap mode. Go to **Policy** or **Computer > Settings > Network Engine > Network Driver Mode**.
- If the issue persists, check the other features that are enabled.

5. For issues involving anti-malware:

Performance Related:

If there are performance or access issues when the AM module is enabled, consider adding the directory or file being scanned to the exclusion list first. To do so, go to the Scan Configuration used by the Computer or Policy (**Policy or Computer > Anti-Malware > General > Select Scan type > Configuration > Edit > Exclusions**). Verify if the issue persists.

If adding the file or directory to the exclusion does not work, remove the policy assigned to the affected machine:

- If the issue persists, disable anti-malware protection. Go to **Policy or Computer > Anti-Malware > General > Anti-Malware State**.
- If the issue continues, deactivate the agent.
- If the issue persists, check the other features that are enabled.

Detection Issues:

- If the issue involves undetected malware, verify the anti-malware state and make sure there are no errors. Check for failed events under **Policy or Computer > Anti-Malware > Events**.

Consult the following for Anti-Malware state verification:

[Troubleshoot Anti-malware Engine Offline error for Windows Deep Security Agent](#)

- [Re-install Deep Security Agent](#).

[Troubleshooting NSX-V Agentless Anti-Malware Engine Offline in Deep Security](#)

- Verify Smart Protection settings and ensure there are no connection failures (**Policy or Computer > Anti-Malware > Smart Protection**).
- Should the issue persist, contact Trend Micro Technical Support.

6. For issues involving integrity monitoring:

- Note if a new rule update has been applied or a modification on a rule has taken place. Note the additional modifications made and review the configuration changes. You can also unassign the suspected rule or roll back the security update. Verify if the issue persists.
- If no recent change or update has been applied but alerts continue to be generated, disable the integrity monitoring by going to **Policy or Computer > Integrity Monitoring > General > Integrity Monitoring State**.
- If the issue persists, check the other features that are enabled.

7. For issues involving log inspection:

- Note if a new rule update has been applied or a modification on a rule has taken place. Note the additional modifications made and review the configuration changes. You can also un-assign the suspected rule or roll back the security update. Verify if the issue persists.
- If no recent change or update has been applied but alerts continue to get generated, disable the log inspection by going to **Policy or Computer > Log Inspection > General > Log Inspection State**.
- If the issue persists, check the other features that are enabled.

## 8 Deployment scenarios

### 8.1 Multi-tenant environment

Multi-tenancy allows you to create independent environments of Deep Security with the same manager and database infrastructure. It can be used by service providers or enterprises that require strong isolation between departments or lines of business.

For sizing information for multi-tenant environments, refer to the Deep Security Help Center:

- [Multi-tenant scalability guidelines](#)
- [Deep Security Manager sizing](#)

Starting with Deep Security 10.2, multi-tenancy is supported when using a PostgreSQL database, with each tenant on a separate database.

Recommendations:

- Reconnaissance IP List

In a multi-tenant environment, the tenants might have to manually add the Deep Security Manager IP address in the **Ignore Reconnaissance IP** list found in **Policies > Common Objects > Lists > IP Lists**. This is to avoid getting the warning message "Reconnaissance Detected: Network or Port Scan".

- Multi-Database Servers

Multi-tenancy relies on using multiple databases in the case of Microsoft SQL or multiple users in the case of Oracle. To scale further, Deep Security Manager can be connected to multiple database servers and automatically distribute the new tenants across the available set of database servers.

To configure additional databases to use, go to **Administration > System Settings > Database Servers**.

- Use the chargeback feature to monitor tenant usage

Monitoring can help determine the percentage usage of Deep Security Manager by hours of protection. Deep Security Manager records data about tenant usage. This information is displayed under **Tenant Protection Activity** on the Dashboard, the tenant **Properties** window's **Statistics** tab, and the **Chargeback** report.

This information can be customized to determine what attributes are included in the record. It also provides the ability to monitor the usage of the overall system and look for indicators of abnormal activity. For instance, if a single tenant experiences a spike in **Security Event Activity**, it might be under attack.

- Tenant pending deletion state

Tenants can be deleted, however the process is not immediate. This guarantees that all the tenant-related jobs are finished before the records are deleted. The longest job runs every week, so the tenant is in the pending deletion state for approximately seven days before the database is removed.

- Multi-tenant options under System Settings
- Allow Tenants to use the relays in the Default Relay Group (for unassigned Relays)

This gives the tenants automatic access to relays setup in the primary tenant and saves the tenants from setting up dedicated relays for security updates.

- Allow Tenants to use the Run Script Scheduled Task

Scripts present a potentially dangerous level of access to the system. However, the risk can be mitigated as scripts must be installed on Deep Security Manager using file-system access.

## 8.2 Environments using teamed NICs

Windows NIC teaming software creates a new virtual interface, which adopts the MAC address of the first subordinate interface. By default, the Windows Agent binds to all virtual and physical interfaces during installation. As a result, in a teamed NIC environment, the agent binds with the physical interfaces as well as the virtual interface created by the teaming software. The agent cannot function properly with multiple interfaces that have the same MAC address.

- To function properly in a teamed-NIC environment, the agent must be bound only to the virtual interface created by the teaming software. For more information, see [Deep Security Agent and Vulnerability Protection Agent are unable to attach to Intel Teamed NIC Virtual Adapter](#).
- Using the agent in a teamed-NICs environment on Windows 2003 requires SP 2 or later.
- The Deep Security Agent's network driver is bound to the network interfaces for only the installation or upgrade period. After installation, it is impossible for the bindings to be automatically adjusted when you add or remove network interfaces to or from a teamed-NIC.

Doing so can lead to network connectivity problems, or to the system not being properly protected. After adding or removing a network interface in a teamed environment where the agent's network driver is installed, verify that the driver is only bound to the virtual interface and not bound to any physical adapters.

- On Solaris systems with multiple interfaces on the same subnet, the operating system may route packets through any of the interfaces. Because of this, any Firewall Stateful Configuration options or intrusion prevention rules should be applied to all interfaces equally.
- Deep Security 10.1 and later prevent a Windows network interruption during Deep Security Agent install or upgrade, which means the TCP connection is maintained when installing, uninstalling, or upgrading the tbimds.sys windows driver.

**NOTE** With Windows XP and Windows 2003, there is still a one-time network disconnection because the OS is using an NDIS 5 framework.

## 8.3 Air-gapped environments

At least one Deep Security Relay is required in every Deep Security environment. The relay must be able to download updates from the Trend Micro Update Server so the rest of the relays, agents and appliances connect to that Relay for update distribution.

If your environment requires that the Deep Security Relay is not allowed to connect to a relay or update server through the internet, then an alternative method is available to import a package of updates to a relay for distribution to other Deep Security Software Components.

For details on generating an update bundle, see [Manually updating the Deep Security Relay Agent \(DSR\)](#) in the Business Support portal.

To avoid confusion when working in an air-gapped scenario, it is recommended to disable the following options under **System Settings > Updates**:

- **Allow Agents/Appliances to update from this source if Deep Security Relays are not available**
- **Agents can update components automatically when not in contact with Deep Security Manager**

#### 8.4 Solaris zones

Keep in mind that Solaris zones allows multiple instances of Solaris to run in one shared kernel.

Deep Security Agent for Solaris is only supported to run with the Global / Root Zone. For details, refer to [Installing Deep Security Agent on Solaris in the global zone](#) in the Business Support portal.

#### 8.5 Microsoft cluster servers

Cluster servers involve two separate installations of the underlying operating system with shared resources (databases, disks, IP addresses) that get swapped back and forth when the cluster performs a failover.

Deep Security can be configured to protect one node in the cluster or both. In this environment, consider the following:

- That you are installing Deep Security Agent to a local disk, and not a shared disk.
- If the cluster software uses a network heartbeat with a dedicated network interface card, no rules should be assigned to this interface. You can also create bypass rules so the heartbeats are not inspected.

Installing or uninstalling Deep Security Agent might cause temporary disconnection of the cluster due to binding or unbinding the drivers. Choose a suitable time for this to happen.

#### 8.6 Microsoft Hyper-V

When deploying Deep Security on a Microsoft Hyper-V environment, Deep Security Agent should be installed within each guest operating system in each virtual machine (VM). This provides the maximum amount of context and security for each guest.

- Recommendation scans can be used to determine the applicable set of intrusion prevention, integrity monitoring and log inspection rules required per guest.
- Anti-malware, web reputation, and firewall policies can also be individually configured per guest using the Deep Security Agent deployment.

To protect the Parent Partition (also known as the Management Operating System), additional steps are required so that the network traffic is not inspected twice.

It is recommended to choose one of the following options:

- Do not use intrusion prevention in the parent partition.
- Use intrusion prevention in the parent partition, but use the firewall policy assigned to the agent in the parent partition to bypass incoming and outgoing traffic for the IPs of the VMs being hosted.

This can be done with two bypass rules - one for incoming and another for outgoing - that operate on the destination IP range of guests for incoming traffic, and the source IP range of guests for outgoing traffic.

Bypass skips the intrusion prevention rule processing, preventing a duplicate inspection of the traffic in both the parent partition and guest virtual machine.

It is also recommended to use bypass rules, such as the second option, if there is a firewall policy on the parent partition.

## 8.7 Virtualized environments (VDI)

### 8.7.1 Install the Guest Introspection Thin Agent with golden image

When using either the traditional installation method or Microsoft Deployment Toolkit (MDT), and preparing the golden images, install the necessary VMware Guest Introspection Thin Agent, which is a part of the VMware Tools.

### 8.7.2 Persistent and non-persistent VMs

Both persistent and non-persistent view desktops need antivirus protection. Agentless protection is recommended for both scenarios. Install VMware tools in the virtual machine before it is converted into a parent virtual machine for linked clones.

If agent-based protection is required, install an un-activated Deep Security Agent on the VM before it becomes the parent virtual machine.

### 8.7.3 Deep Security Notifier

The notifier file `ds_notifier.vif` should not be added into exclusion due to infrastructure changes. VMware VMCI is no longer used for the Trend Micro Notifier. If the notifier is not working, make sure the `C:\ProgramData\ds_notifier.vif` was not added into the exclusion list.

### 8.7.4 Automating VM activations

Deep Security Virtual Appliance can instantiate and activate virtual agents for virtual machines as they are created and assigned a specific policy automatically. Event-based tasks should be created so it can trigger Instant Protection functionality when VMs are added to a virtual environment protected by Deep Security Virtual Appliance. To configure event-based tasks, go to **Administration > Event-Based Tasks**.

Event-based tasks can use conditions to trigger the action. The conditions use standard regex expressions. To know more about regex usage and to test the expressions configured, see the following:

- <http://www.regular-expressions.info/> (Regex reference)
- <http://regexpal.com/> (Regex expression tester)

### 8.7.5 Note the number of protected VMs

Deep Security Manager must control the maximum number of protected VMs running on each protected ESXi host. Improper sizing can degrade the Deep Security Virtual Appliance performance. See [Sizing](#) in the Deep Security Help Center.

For additional best practice details on running anti-malware protection for VMware View, see <http://www.vmware.com/files/pdf/VMware-View-AntiVirusPractices-TN-EN.pdf>

For limitations on the VMware side, see [NSX for vSphere Configuration Maximums](#).

#### 8.7.6 Activating VM using event-based task

Trend Micro recommends setting a delay time for event-based task for a successful activation execution. See [Activating virtual machine \(VM\) using Event-Based Task fails in Deep Security](#) in the Business Support portal.

#### 8.7.7 Golden image

When using golden image in a VDI environment, you must select the correct OS type to avoid Deep Security Manager reporting an incapable anti-malware.

#### 8.7.8 Citrix XenDesktop

##### A. Install a deactivated Deep Security Agent on a golden image

Deep Security Virtual Appliance (Agentless) does not work with a pure Citrix environment (VMs running on Citrix XenServer).

For these environments, the physical agent-based solution is recommended. Install the agents in the golden image (deactivated) and then perform agent-based activation in the provisioning process. Use an Event-Based Task to assign the correct policy based on the attributes available (such as Computer Name).

Activating an agent using the Deep Security Manager console has its limits. These limits are sometimes due to network topology or firewall constraints that could prevent manager-initiated activation jobs. In some environments (non-persistent), using different scripting techniques (such as ScriptLogic, PowerShell or Batch script) are the most common ways to automatically activate and configure Deep Security Agent.

Alternatively, you can achieve the same result when Deep Security Agent is installed into a golden image and the streaming (PVS) Citrix VDI desktops are running on top of VMware vSphere Environment.

- If a computer with the same name already exists, reactivate the existing computer
- Reactivate cloned agents
- Reactivate unknown agents

With this setting, the previously activated Deep Security Agent in the golden image is reactivated the first time that it contacts Deep Security Manager from the streaming VM on which it was launched. This all occurs in the context of the first heartbeat. It does not require a second heartbeat to complete. Remember, this functionality works in both agent-initiated communication mode and bi-directional communication mode. Deep Security Manager does not need to establish a connection to the agent for this function to work (as long as the agent is able to connect to Deep Security Manager). If your network only allows one-way communication (such as Agent-to-Manager) it is recommended that you change **Direction of Deep Security Manager to Agent/Appliance communication** to **Agent/Appliance Initiated**.

##### Conflict resolution with Personal vDisk (Persistent)

For Deep Security Agent to work properly with Citrix Personal vDisk (PvD) in XenDesktop, you must add a folder and file rules in the golden image to always overwrite PVD content and allow the agent to generate the `ds_agent.config` file.

The folder rule forces the files in the golden image C:\programdata\Trend Micro\Deep Security Agent\dsa\_core directory to always overwrite PVD content. While this rule works, it does not allow the agent operation to generate ds\_agent.config file. Without this file, the agent service cannot start properly, so the agent automatic reactivation fails. Therefore, a file rule must be created as well to allow the ds\_agent.config file to be created.

The file rule is combined with the folder rules during PVD update.

files\_rules.txt addition

[Rule-Begin]

Type=File-Catalog-Construction

Action=Catalog-Location-Guest-Modifiable

name="%ALLUSERSPROFILE%\Trend Micro\Deep Security Agent\dsa\_core\ds\_agent.config"

name="%PROGRAMFILES%\Trend Micro\Deep Security Agent\AgentData\dsa\_core\ds\_agent.config"

[Rule-End]

custom\_folders\_rules.txt addition

[Rule-Begin]

Type=Conflict-Resolution

Action=Rebuild-Dst

name="%ALLUSERSPROFILE%\Trend Micro\\*\*\\*\*"

name="%PROGRAMFILES%\Trend Micro\\*\*\\*\*"

[Rule-End]

**NOTE** Deep Security Virtual Appliance (Agentless) can be used to provide protection for the pooled Citrix VDI desktops if they are running on top of VMware vSphere. VMware tools would also need to be installed within the golden image to include the necessary vShield Endpoint driver to use appliance-based protection.

## B. Deep Security Agent and the Citrix target device driver

On Citrix PVS 6.0 Environment, if you are installing (In-Guest) Deep Security Agent, the Citrix Target device driver might not be able to connect successfully to the provisioning server due to a possible conflict.

If you are installing Deep Security Agent on a Windows operating system that is connected to a PVS server using disk provisioning, the temporary workaround is to change the tbimdsa driver loading order during system startup from PNP\_TDI to NDIS.

To do so, manually change the loading order of tbimdsa driver used by Deep Security Agent:

1. Go to HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Services\tbimdsa
2. Add or modify String “Group” value to “NDIS”
3. Add or modify DWORD “Start” value to “0”

4. By changing the Group from “PNP\_TDI” to “NDIS” and Start value from “3” to “0”, it allows tbimds driver to load after Citrix driver has loaded.
5. Reboot the machine. The PVS Target Device can connect to the vDisk upon boot-up.

Refer to the article [Citrix Target Device driver cannot connect to the provisioning server when in-guest Deep Security Agent \(DSA\) is installed on Citrix PVS 6.0 environment](#) in the Business Support portal for more details.

#### Citrix XenApp

1. Citrix XenApp’s API Hooks

Citrix’s API hooks can prevent the Deep Security Agent service from starting. To resolve this, the `ds_agent.exe` must be added into XenApps exclusion list. For more information, see [How to Disable Citrix API Hooks on a Per-application Basis](#) in the Citrix documentation

2. Anti-Malware Exclusion for Citrix

Trend Micro recommends that Citrix files are excluded from scanning by Deep Security. For a more comprehensive list of recommended scan exclusion, refer to [Citrix-recommended exclusions on Deep Security](#) in the Business Support portal.

## 8.8 Private, public, and hybrid cloud environments

### 8.8.1 Amazon Web Services (AWS)

Deep Security Manager can now be connected to Amazon Web Services to provide instance discovery and collect additional information about these instances. This can be used to automate security (for example, assigning a policy based on an Amazon Security Group).

Assign a dedicated account for Deep Security so that you can refine the rights and permissions or revoke the account at any time. It is recommended that you give Deep Security an Access and Secret key with only read-only permissions.

Deep Security 20 LTS supports Amazon RDS PostgreSQL in Multi-AZ deployments. However, the recommendation is that databases hosted in the cloud should not use multiple availability zones (multi-AZ), which can increase network latency.

If you use AWS Marketplace or implement software installations to AWS, use of RDS PostgreSQL is a common deployment configuration. Amazon RDS provides high availability and failover support for database instances using Multi-AZ deployments. For more information, see [High Availability \(Multi-AZ\) for Amazon RDS](#) in the AWS documentation.

**NOTE** If you activate a Deep Security Agent (for Windows) on an AWS WorkSpace and apply a policy that uses the default firewall rules, the workspace will become unhealthy. You must alter the policy to allow access to the ports required by WorkSpaces.

### 8.8.2 vCloud environment

Deep Security Manager can now connect to the vCloud director to discover the machines that need to be protected. If this is used with a public cloud, it can help with agent management. If vCloud is used within a private or community cloud where Deep Security Manager is deployed, the vCloud support can work together with the vCenter integration to provide agentless protection to vCloud.

The vCloud director (vCD) workloads are presented in Deep Security in the following hierarchy:

1. vCloud Director Instance
2. Virtual Datacenter
3. vApp
4. Virtual Machine (being the endpoint that can be protected)

This allows the administrator to select virtual machines from certain vDC/vApp's to be protected.

- Multiple vCD instances can be presented, but make sure the following rules are applied:
  - All vCenters that vCD used for resources are already configured in the administrative side of the portal.
  - Present vCD instances at vCD System object. This allows all workloads to be discovered in vCD.
- The following vCloud Director settings must be configured correctly:
  - vCD public URL
  - vCD public REST API base URL (**System > Administration > Public Addresses**)
- The vCloud organization accounts used by Deep Security Manager to access vCloud must have the Administrator View right. This can be verified by checking the user's role properties in vCloud, then by going to the **Rights for this Role > All Rights > General** folder.

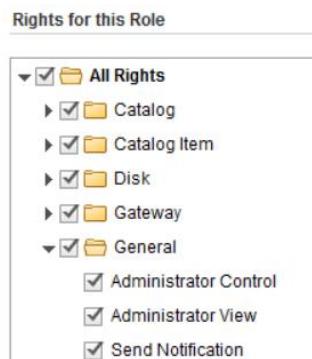


Figure 35: Rights for this Role

- Consider the following settings when adding the vCloud Director Instance:
  - The name should be descriptive.
  - Enter the address of the vCloud Director instance as follows:  
vcloud.mycompany.com
  - There is no need to add "http" or "https" in the From field of the address.
  - There is no need to add the organization name at the end of the URL.
- When importing the vCloud resources into Deep Security Manager, the user name must include "@orgName". For example, if the vCloud account's user name is "kevin" and the vCloud Organization you've given the account access to is "CloudOrgOne", then the Deep Security user must enter "kevin@CloudOrgOne" as their user name.

- When adding more than one vCloud Director instance, ensure that the corresponding Provider Virtual Datacenter resources have been added to Deep Security Manager. This includes:
  - All vCenter instances used for Provider Virtual Datacenters
  - All vShield Manager instances used for Provider Virtual Datacenters
- Public Catalog VMs must have the VMware Tool as part of the template configuration before adding the vApp/VM to the catalog. If you are using DSVA Agentless solution, when you install VMware Tools, you also need the VMCI Driver with NSX File Introspection Driver installed.
- Deep Security requires that all protected virtual machines have unique UUIDs. Virtual machines created from a vApp template can be assigned duplicate UUIDs, which can cause problems. To configure your vCloud database to assign unique UUIDs, set the CloneBiosUuidOnVmCopy property to zero (0) following VMware Knowledge Base article 2002506.

See also [Changing the UUID of vCenter Servers in Deep Security.](#)

#### 8.8.3 VMware SRM (Site Recovery Management) environment

In the VMware SRM (Site Recovery Management) environment, both multi-node Deep Security Manager and separate Deep Security Manager are supported to provide protections:

- Scenario 1: Multi-node Deep Security Manager in Protected site-A and Recovery Site-B.
- Scenario 2: Separate Deep Security Manager in Protected site-A and Recovery Site-B.

Scenario 1 and 2, agentless (Deep Security Virtual Appliance) both work after a failover to the recovered site and after returning back to the protected site.

The agent-based (Deep Security Agent), can ONLY be managed by one site. Although the VMs cannot be managed after failover to recovery site, the Deep Security Agent service and function can still work. Once returned to the protected site, the VMs can be managed and should work normally.

By design, when the VMs are set up in VMware Site Recovery Protection Groups, the Recovery site's VMs icon is changed, as per the following illustration:

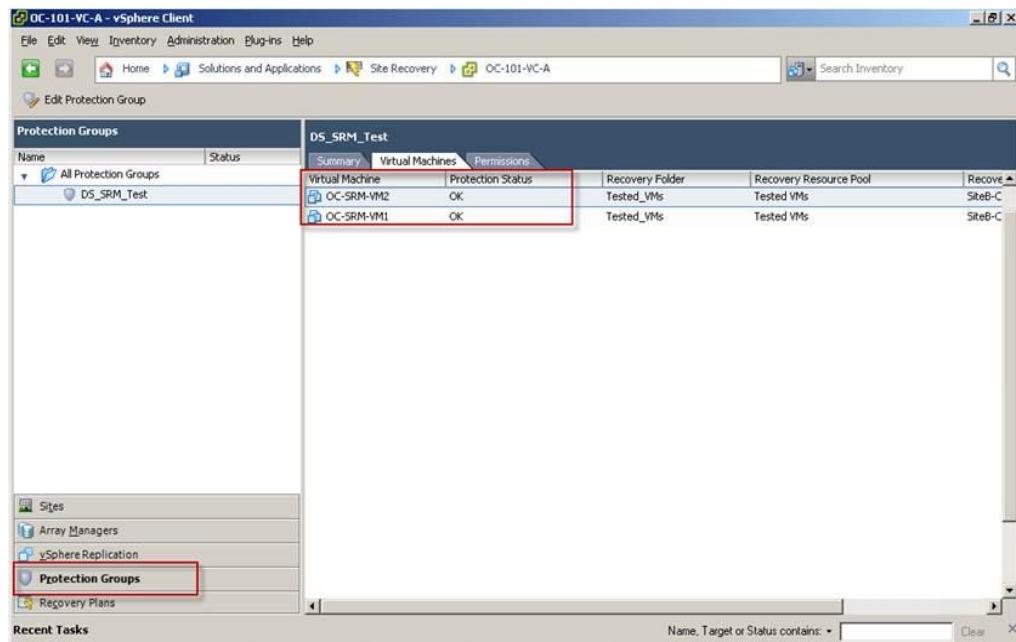


Figure 36: VMware Site Recovery Protection Groups

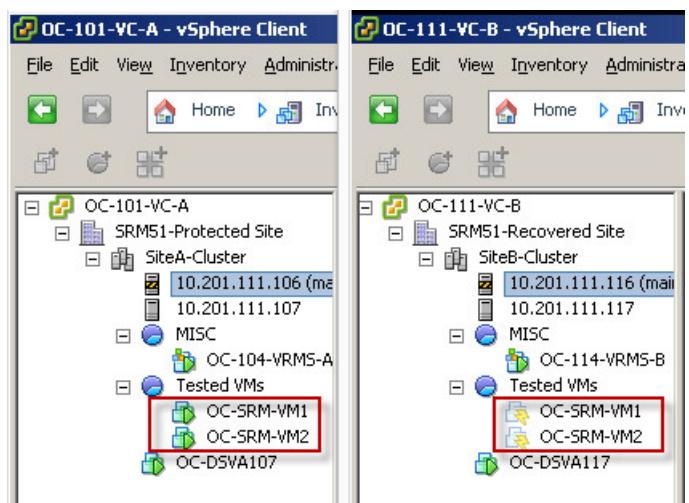


Figure 37: Changed icons of Protection Groups

On Deep Security Manager, both the protected site's VMs and the Recovery site's VMs are displayed before the recovery. Therefore, you cannot use the **Event-Based Tasks (Computer-Created)** to activate or re-activate the VMs when they failover to Recovery Site.

## 8.9 SAP

If you install Deep Security Agent prior to SAP server with Virus Scan Adapter, disable the real-time scan of Deep Security Agent before the SAP installation to avoid race condition.

Create a new security profile for SAP server only. Do not use the existing policy plus the SAP function.

When SAP module is on, the AM module should be on agent in combined mode.

Exclude the SAP folders from AM scanning and IM baseline (“/usr/sap” on Linux systems).

## 8.10 IBM Rational ClearCase

If the Deep Security on a Linux has IBM Rational ClearCase installed, it can result in server freeze. See the IBM recommendation for running the AV on the server at [Support Policy for Anti-Virus and ClearCase](#).

## 8.11 Docker support

For information on using Deep Security to protect Docker containers, see [Protect Docker containers](#) in the Deep Security Help Center.

### 8.11.1 Supported Docker platforms

Deep Security protects your Docker hosts and containers running on Linux distributions. Deep Security Agent should be installed into Docker host. Installing Deep Security Agent to Docker container is not supported.

The Docker host OS must be one supported by Deep Security Agent 20 LTS:

- Red Hat Enterprise Linux/CentOS
- SUSE Linux Enterprise Server
- Amazon Linux
- Ubuntu
- Debian

The following Docker optimized host operating systems are not supported:

- Atomic Host
- Snappy Ubuntu Core
- Photon OS

However, Docker container can be based on any distributions, such as Alpine Linux, Busybox, and others.

### 8.11.2 Container protection

Deep Security Agent 20 LTS provides intrusion prevention and real-time anti-malware features to Docker containers by installing Deep Security Agent to Docker host.

#### A. Intrusion Prevention

With Deep Security 10.2 and later (including Deep Security 11), the functionality around iptables has changed. Deep Security Agent no longer disables iptables. If iptables is enabled, it stays enabled after the agent installation; if iptables is disabled, it stays disabled.

However, if the iptables service is running, Deep Security Agent and Deep Security Manager require certain iptables rules added to allow communication with each other.

You can prevent Deep Security Manager and Deep Security Agent from modifying iptables if you would rather add the required rules manually. To prevent the automatic modification of iptables, create the following file on the computers where you plan to install Deep Security Manager and Deep Security Agent:

```
/etc/do_not_open_ports_on_iptables
```

Note that assigned IPS rules take effect to all Docker containers on the same host because Deep Security Agent is working at the host level.

Because iptables is enabled, you should also allow communication ports required for Deep Security Agent in iptables rule, such as 4118/tcp. For required ports, refer to [Communication ports used by Deep Security](#).

#### B. Recommendation scan

Recommendation scan does not completely work for applications in Docker containers. You should manually choose which IPS rules to assign. Some IPS rules might be recommended even if the application is not vulnerable because Deep Security Agent can only find running processes in containers but not detect the application version.

#### C. Inter-container traffic

Deep Security's network security features (firewall, intrusion prevention, web reputation) does not affect inter-container traffic on a host in either classic link model (by --link option) or networking model.

#### D. Host port and container port

Because Deep Security Agent works at host, container service port and host service port should be the same so IPS rules can inspect traffic as expected. For example, if you run web server on container port 80/tcp, you should bind it to host port 80/TCP. Otherwise, you should modify port configuration at all application types to add host service port.

Some container orchestration platforms, such as Amazon ECS or Kubernetes, can use dynamic host port by its configuration. You should configure to use static host port same as container service port.

### 8.11.3 Host protection

Deep Security Agent 20 LTS provides all security features to Docker host.

#### A. Firewall

You do not need to enable Deep Security Firewall feature in general, because Docker container only exposes ports that are explicitly configured. If you must use it, there are several points and limitations as shown below.

If you use firewall on Docker host, you should allow BOTH incoming and outgoing traffic for incoming connection to Docker container application. For example, if you are running web server in a Docker container on port 80/TCP, you must allow incoming traffic to Docker host on port 80/TCP AND outgoing traffic to Docker container on port 80/TCP.

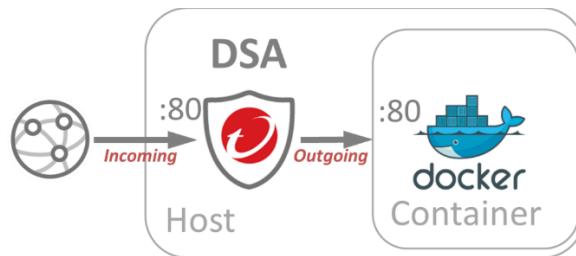


Figure 38: Firewall on Docker Host

You might also need to allow some ports at host to be used by Docker and related orchestration framework. Below are some examples.

- Docker Remote API port 2375/TCP (HTTP) or 2376/TCP (HTTPS), Docker registry 5000/TCP
- Amazon ECS Agent 443/TCP, 51678/TCP, 51679/TCP  
[http://docs.aws.amazon.com/AmazonECS/latest/APIReference/API\\_PortMapping.html](http://docs.aws.amazon.com/AmazonECS/latest/APIReference/API_PortMapping.html)
- Kubernetes apiserver 8080/tcp(HTTP) or 6443/tcp(HTTPS), etcd 2379/tcp, kubelet 10250/tcp and 10255/tcp  
<https://kubernetes.io/docs/admin/kube-apiserver/>  
<https://kubernetes.io/docs/admin/kubelet/>
- Docker swarm mode 2377/tcp, 7946/tcp+udp and 4789/tcp+udp  
<https://docs.docker.com/engine/swarm/swarm-tutorial/#/open-ports-between-the-hosts>

You cannot use random (dynamic) host port mapping with Deep Security Firewall because rule cannot be adapted to dynamic ports.

#### 8.11.4 Deployment scripts

Amazon ECS (EC2 Container Service)

When deploying Deep Security Agent to Amazon ECS cluster instance, you can modify Deployment Script to be put into instance user-data:

```
#!/usr/bin/env bash
echo ECS_CLUSTER=ClusterName >> /etc/ecs/ecs.config
touch /etc/use_dsa_with_iptables
curl https://app.deepsecurity.trendmicro.com:443/software/agent/amzn1/x86_64/ -o /tmp/agent.rpm -s
rpm -ihv /tmp/agent.rpm
...(snip)...
```

Also:

- You can put your ClusterName for the instance to join to ECS cluster.
- Use curl instead of wget because wget is not installed by default in Amazon ECS-optimized AMI.

## 8.12 Automation activation from golden image

You can automate Deep Security protection using vSphere 6 + vCNS with Combined Protection or Agent only as follows:

1. Enable Agent-Activation on Deep Security console.

Hostnames

Update the 'Hostname' entry if an IP is used as a hostname and a change in IP is detected on the computer after Agent/Appliance-initiated communication or discovery

**Agent-Initiated Activation**

Allow Agent-initiated Activation

For Any Computers

For Existing Computers

For Computers on the following IP List:

Policy to assign (if Policy not assigned by activation script):

Allow Agent to specify hostname

If a computer with the same name already exists:

Figure 39: Enable Agent-Activation

2. Create an Event Based Task to activate in which security profile you would like to configure the VDI or VM:

Event-Based Tasks

NAME	TYPE
------	------

Select the event that this task will be based on.

Event: Agent-Initiated Activation

< Back  Cancel

Figure 40: Agent-Initiated Activation

Select the action(s) to perform.

Assign Policy:

Assign Relay Group:

Assign to Computer Group:

< Back  Cancel

Figure 41: Assign to Computer Group

Specify any match condition(s). (All conditions have to be met before the task is carried out.)

Computer Name  matches  +

< Back  Cancel

Figure 42: Computer Name

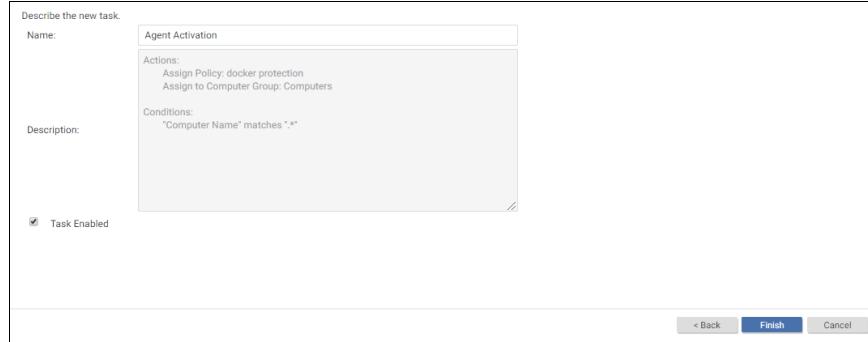


Figure 43: Describe the new task

On Event Based Task, you can define the Security Profile that the VM needs to receive, based on the configuration (vCenter Name, Folder Name from vCenter, ESXI host, Platform Last IP Usage and other configuration).

3. Install Deep Security Agent to the golden Image. Do not activate on Deep Security Manager. Only install the agent.
4. Create a batch file to the golden image, such as the sample scripts to insert on VDI or VM (all scripts are in .bat format).

Script to use on golden image with IMG as a hostname:




```
SET var=%COMPUTERNAME%
SET var=%var:~0,3%
IF "%var%"=="IMG" (
    exit
)
ELSE (
    cd "C:\Program Files\Trend Micro\Deep Security Agent\
    dsa_control.cmd -a dsm://(IP or Hostname DSM):4120/
)
```



Script to a Normal VM if you wish to activate the VM automatically:


```
cd "C:\Program Files\Trend Micro\Deep Security Agent\
dsa_control.cmd -a dsm:// (IP or Hostname DSM):4120/
```

Creating a Windows Task Scheduler event to execute the BAT file every time a VDI or VM is created and when you execute a recompose on VMware Horizon:

This procedure must be done on the golden image:

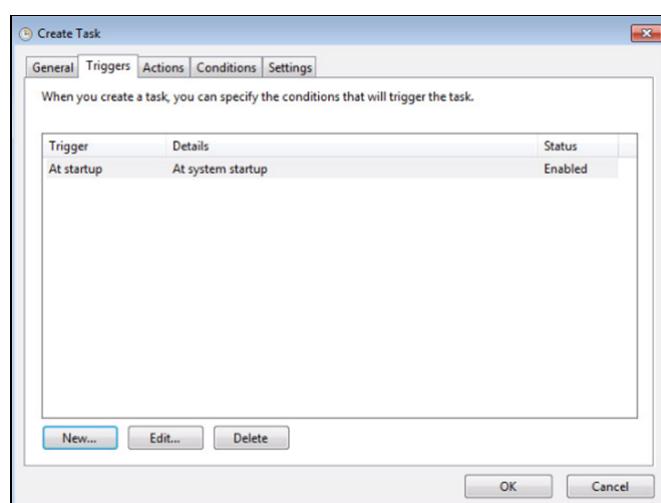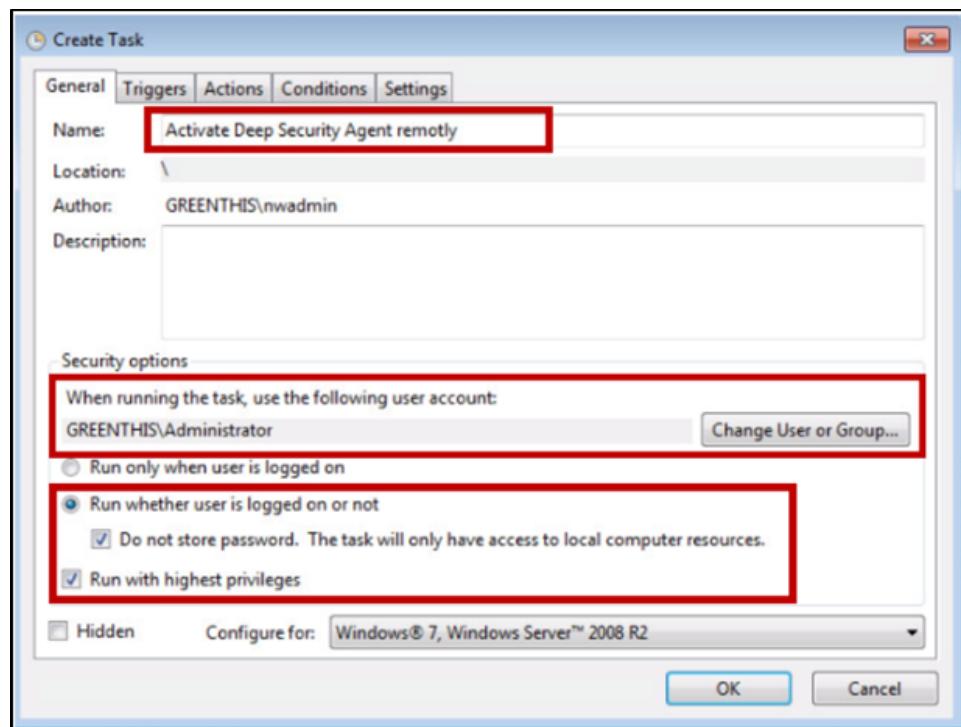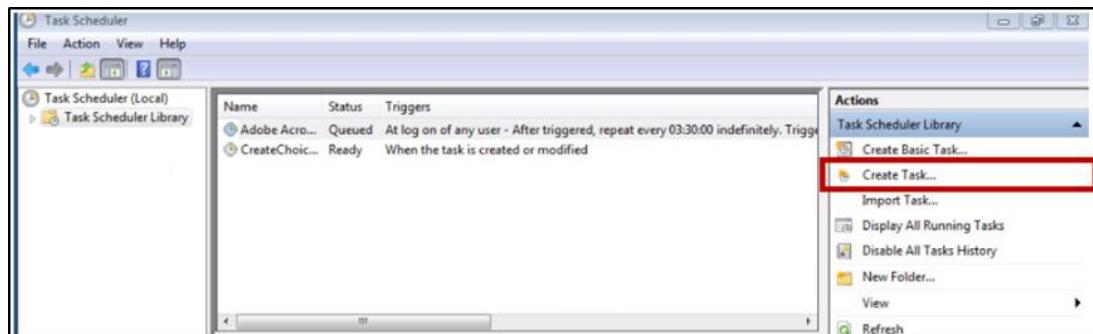

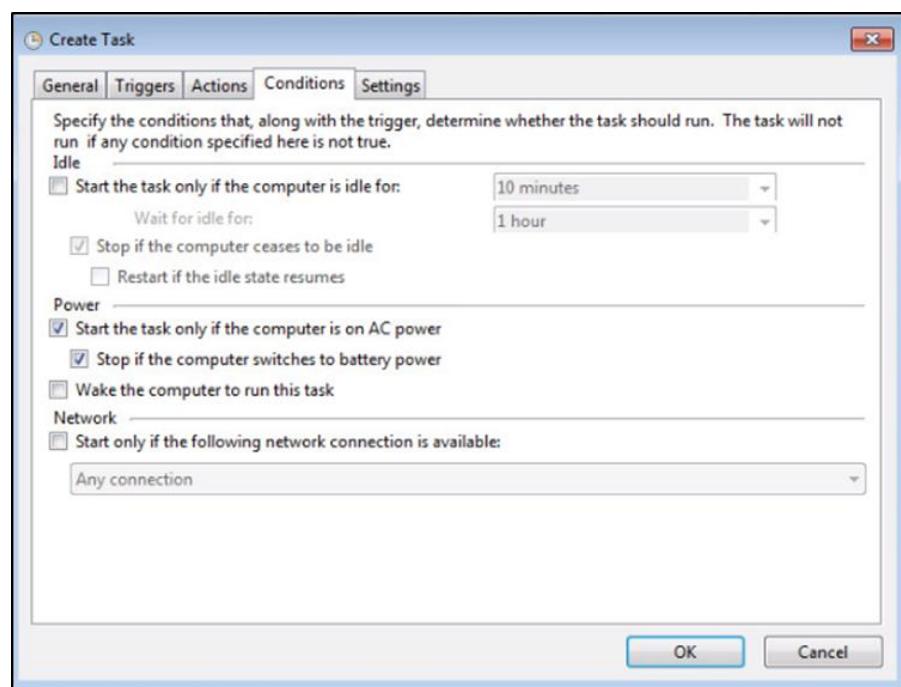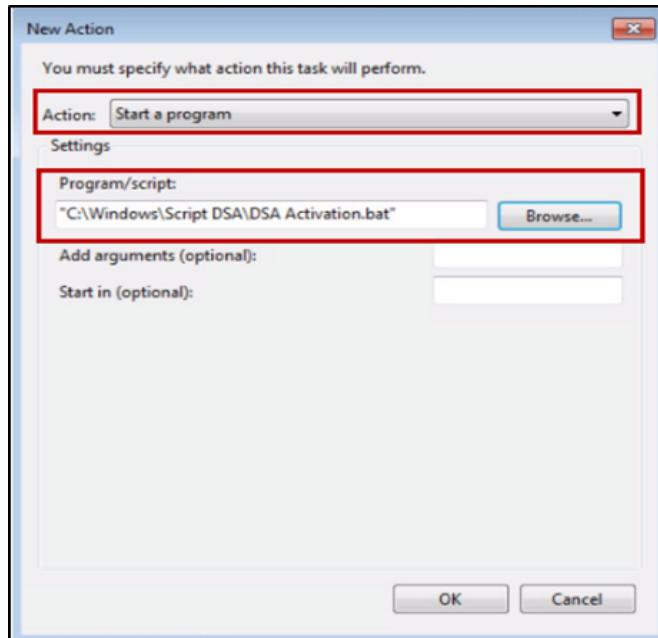

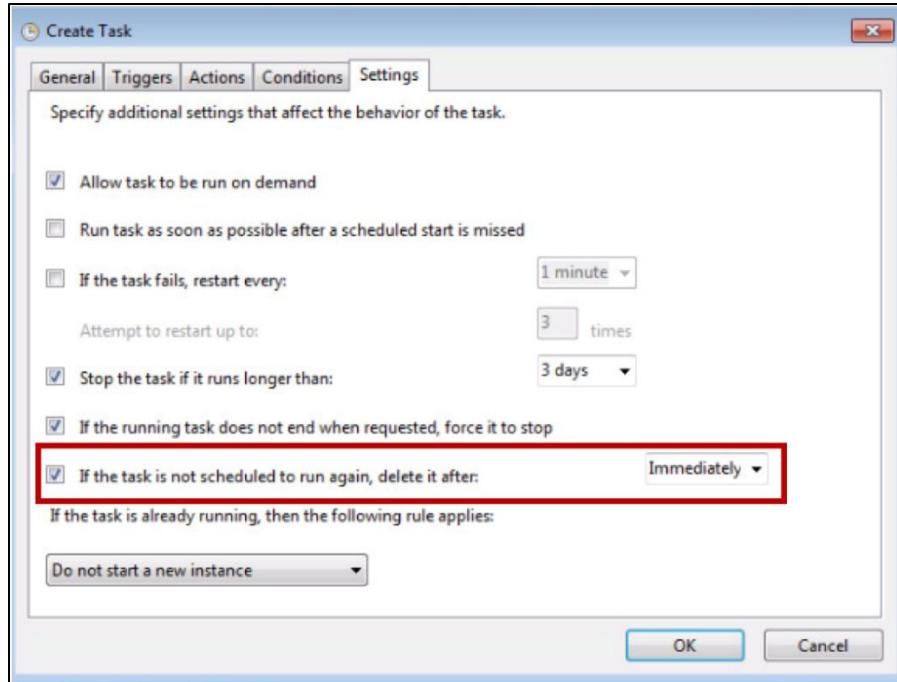

To test the new settings, create a new VM based on the new golden image using the new configuration.

### 8.13 Oracle RAC cluster

Some clustering applications, such as the Oracle RAC database, are highly sensitive to the packet latency impact of the Deep Security firewall and intrusion prevention features, leading to cluster node evictions and data replication performance issues. To help avoid these issues, you should bypass the dedicated NIC that is used for cluster traffic only (but never bypass a NIC with production traffic).

For more information, see [Bypassing dedicated network interface in AIX or Oracle Linux RAC DB cluster environment](#) in the Business Support portal.

### 8.14 SAML

When configuring SAML, keep in mind the following:

- You are using the Deep Security Manager URL (as opposed to Deep Security as a Service URL) in ADFS or others.
- The Deep Security Manager server's time has been synced with NTP servers.
- During Active Directory mapping, make sure you have the correct name convention. The default mapping for Deep Security is to map TMDS-xxxx groups in Active Directory and ADFS-xxxx in Deep Security Manager.
- There is a maximum of 10 roles allowed when configuring SAML.

### 8.15 File system support

Real-time anti-malware support on Linux: Real-time anti-malware scanning is highly dependent on the file system hooking implementation, so file system incompatibility can cause issues with this feature. The following table shows which file systems are compatible with the feature. You may refer to [Supported Features by Platform](#) page for more information.

	ext2	
	ext3	
	ext4	
	XFS	
	Btrfs	
	VFAT	
Disk file systems		
Optical discs	ISO 9660	
	tmpfs	
Special file systems	aufs	
	OverlayFS	
Network file systems	NFSv3	
(see Note, below)	NFSv4	
	SMB	
	CIFS	
	FTP	

### 8.16 Known issue with anti-malware causing kernel panic

There is a known issue with anti-malware causing kernel panic due to incompatible file system (GlusterFS). As of this writing, Deep Security Agent does not officially support Gluster Filesystem (GlusterFS). As a workaround, add the [GlusterFS to Process Image Exclusion](#).